Delfield

F16HD

31.5" (80cm) Deep Hinged Door Base Utility Stands

Project _____

Item _____

Quantity _____

CSI Section 11400

Approved _____

Date _____

Models

- F16HD19 19" hinged door utility stand
- F16HD27 27" hinged door utility stand
- F16HD38 38" hinged door utility stand
- F16HD46 46" hinged door utility stand
- F16HD54 54" hinged door utility stand
- F16HD64 64" hinged door utility stand
- F16HD73 73" hinged door utility stand
- F16HD81 81" hinged door utility stand

F16HD73

Standard Features

- Top is constructed of 16-gauge stainless steel
- Work height is 36"
- Two pieces of 14-gauge U-channel are welded and glued under the top for strength and sound deadening
- Two shelves constructed of stainless steel with double hemmed nosing with 16-gauge under center shelf and one 20-gauge under bottom shelf and PL-400 sound-deadening adhesive
- 14-gauge leg rails that run the entire length of the unit
- Constructed with heavy gauge stainless steel fully welded in place
- Handles are recessed black plastic and held in with a positive lock system
- Units are standard with unfinished ends, for finished end accessories see below
- One year parts and 90 day labor standard warranty

Options & Accessories

- Stainless steel back
- Stainless steel end
- Laminate facing
- Laminate end
- Locks
- Casters
- Urn trough

Specifications

Top is constructed of 16-gauge stainless steel, with integral 2.12" (5.4cm) square nosing on front and 4" (10.2cm) high by 2" (5.1cm) thick backsplash on rear.

Base has (2) 22-gauge stainless steel shelves. Shelf to have 5.62" (14.3cm) turn-up in rear. Hinged doors enclose cabinet front. Doors are constructed of 22-gauge stainless steel; end panels are unfinished.

Unit is mounted on 6.13" (15.6cm) high adjustable stainless steel legs.

NSF®

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981
Fax: 800-669-0619

www.delfield.com

Manitowoc

F16HD: 31.5" (80cm) Deep Hinged Door Base Utility Stands

Delfield

F16HD

31.5" (80cm) Deep Hinged Door Base Utility Stands



Plan View
All Models



Elevation View
F16HD19



Elevation View
F16HD27



Elevation View
F16HD38



Elevation View
F16HD46



Elevation View
F16HD54

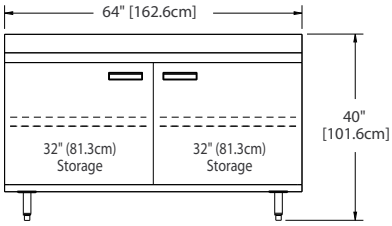

Elevation View
F16HD64

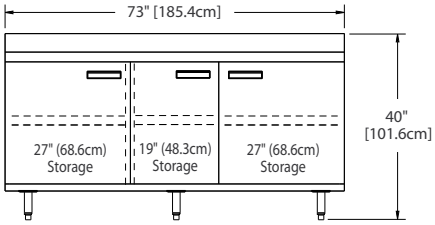

Elevation View
F16HD73

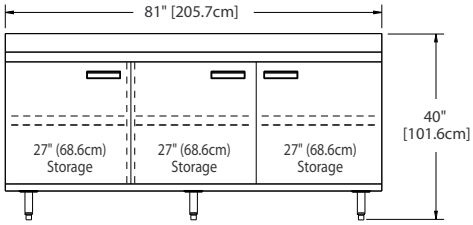

Elevation View
F16HD81



End View
All Models

Specifications

Model	*Length*	*Doors*	*# Of Shelves*	*Shelf Capacity*	*Ship Weight*
F16HD19	19" (48cm)	19"	2	5.95ft²	210lbs/95kg
F16HD27	27" (69cm)	27"	2	8.75ft²	245lbs/111kg
F16HD38	38" (97cm)	(2) 19"	2	12.6ft²	285lbs/129kg
F16HD46	46" (117cm)	19" & 27"	2	15.4ft²	300lbs/136kg
F16HD54	54" (137cm)	(2) 27"	2	18.2ft²	335lbs/152kg
F16HD64	64" (163cm)	(2) 32"	2	21.7ft²	385lbs/174kg
F16HD73	73" (185cm)	19" & (2) 27"	2	24.85ft²	420lbs/190kg
F16HD81	81" (206cm)	(3) 27"	2	27.65ft²	485lbs/220kg

Delfield reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981
Fax: 800-669-0619
www.delfield.com

Printed in the U.S.A.
DS16HD
10/09

Manitowoc