Shelleybasic™ by Delfield

SE-C/SES-C

Mobile Self-Contained Cold Pan Serving Counters

Project _____

Item _____

Quantity _____

CSI Section 11400

Approved _____

Date _____

Models

- SE-C2 39″ cold pan serving counter, accommodates two 12″ x 20″ x 6″ pans
- SE-C3 50″ cold pan serving counter, accommodates three 12″ x 20″ x 6″ pans
- SE-C4 64″ cold pan serving counter, accommodates four 12″ x 20″ x 6″ pans
- SE-C5 78″ cold pan serving counter, accommodates five 12″ x 20″ x 6″ pans
- SE-C6 92″ cold pan serving counter, accommodates six 12″ x 20″ x 6″ pans

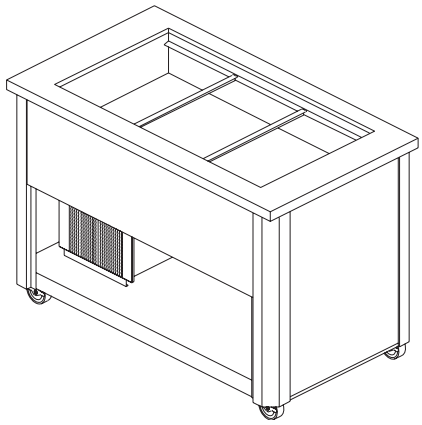

SE-C3

Standard Features

- 9″ deep (recessed 2″, accommodates 6″ deep pans) stainless steel Bloomington style cold pan
- Condensing unit, drain with valve
- Cord and plug
- 5″ swivel, locking casters
- 16 gauge stainless steel tops
- Open on the operator's side, furnished with a full bottom stainless steel shelf
- Delfield's exclusive Delrite™ ABS or reversible laminated modesty panels in front and ends of unit
- Black laminate backs each modesty panel (laminated panels only)
- Cold pan and is fully insulated with foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane insulation
- One year parts and 90 day labor standard warranty

Options & Accessories

- Tray slide
- Cutting board
- Work shelf
- Pin alignment
- Food shields
- Overshelf
- Light fixtures*
- Heat lamps*
- 115V/15A outlet*
- End shelf
- Legs
- Additional warranties

** Inclusion of these options will alter the electrical specifications of unit*

Specifications

Exterior Body: Open frame construction with 16-gauge stainless steel corners: 18-gauge stainless steel full bottom shelf and stainless steel C channel front and sides for optional accent panels.

Exterior Top: Constructed of 16-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners.

Refrigeration: Cold pan is 9″ (23cm) deep (recessed 2″ (5cm), accommodates 6″ (15cm) deep pans) and constructed of stainless steel. The cold pan is separated from the exterior top by a thermal break. Copper refrigeration tubing is attached to the sides of the cold pan and is fully insulated with foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane insulation. Cold pan is equipped with a drain, gate valve and garden hose hookup. Temperatures of 33ºF (1C) to 41ºF (5C) are maintained with pans recessed 2″ (5cm) at 86ºF (30ºC) ambient room temperature. Pans rest on a stainless steel ledge.

Refrigeration System: Uses R-134a refrigerant and has a self-contained 115 volt, 60 hertz, single phase hermetically sealed condensing unit with adjustable cold pan temperature control. Unit is wired with a 3-wire, grounded, maximum 10′ (3m) cord and plug. Unit has an on/off switch mounted on the exterior of the compressor housing.

Casters: Units are mounted on 5″ (13cm) diameter swivel casters with non-marking polyolefin tires and plate brakes. Overall height of caster assembly is 6″ (15cm).

134a REFRIGERANT

Manitowoc enerlogic

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981
Fax: 800-669-0619

www.delfield.com

Manitowoc

Shelleybasic™
by Delfield



Plan View
SE-C2, SES-C2

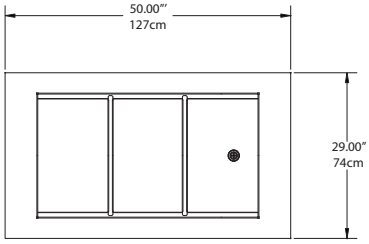

Plan View
SE-C3, SES-C3

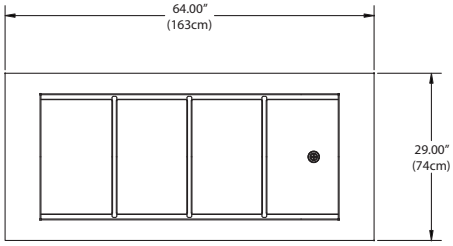

Plan View
SE-C4, SES-C4

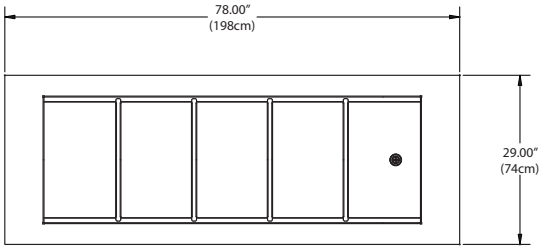

Plan View
SE-C5, SES-C5

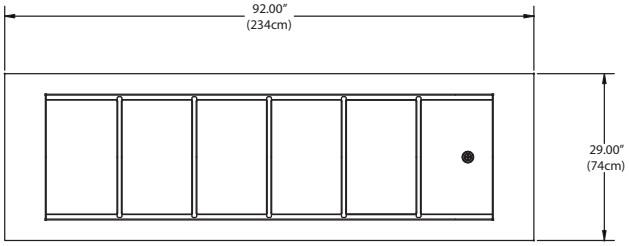

Plan View
SE-C6, SES-C6

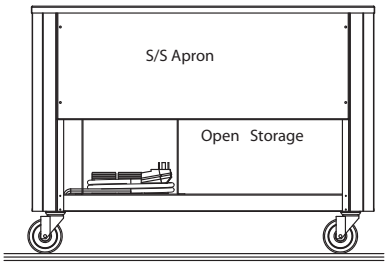

Elevation View
All Models



End View
SE Models



End View
SES Models

Model Number and Information

SE-C/SES-C

Specifications

Model	12" x 20" x 4" Pans Held	L	D	H	NEMA Plug	Volts	Amps	H.P.	Ship Weight	Freight Class
SE-C2	2	39.00" (99cm)	29.00" (74cm)	36.00" (91cm)	5-15P	115	4.0	1/5	340lbs (154kg)	100
SE-C3	3	50.00" (127cm)	29.00" (74cm)	36.00" (91cm)	5-15P	115	4.0	1/5	415lbs (188kg)	100
SE-C4	4	64.00" (163cm)	29.00" (74cm)	36.00" (91cm)	5-15P	115	7.0	1/4	490lbs (222kg)	100
SE-C5	5	78.00" (198cm)	29.00" (74cm)	36.00" (91cm)	5-15P	115	7.0	1/4	565lbs (256kg)	100
SE-C6	6	92.00" (234cm)	29.00" (74cm)	36.00" (91cm)	5-15P	115	8.0	1/3	640lbs (290kg)	100

Add S for 30.00" (76cm) high models (example SES-C).

Delfield reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981
Fax: 800-669-0619
www.delfield.com

Printed in the U.S.A.
DSSEC
05/13

Manitowoc