



# F18WC

31.5" (80cm) Deep Self-Contained Refrigerated Work Tables


Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400  
 Approved \_\_\_\_\_  
 Date \_\_\_\_\_

# F18WC:

31.5" (80cm) Deep Self-Contained Refrigerated Work Tables

## Models

- F18WC39    39" refrigerated work table
- F18WC47    47" refrigerated work table
- F18WC52    52" refrigerated work table
- F18WC60    60" refrigerated work table
- F18WC68    68" refrigerated work table
- F18WC78    78" refrigerated work table
- F18WC87    87" refrigerated work table
- F18WC95    95" refrigerated work table

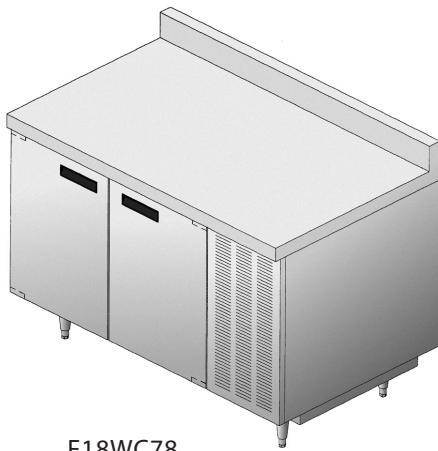

F18WC78

## Standard Features

- Standard heavy duty units have unfinished ends
- Heavy duty stainless steel top construction
- Stainless steel refrigerated base interior back and bottom
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane insulation keeps energy costs low
- Base fronts are made of ABS plastic backed by rigid polyurethane injection molded frames
- One epoxy coated shelf for each door
- Snap-in dart style vinyl magnetic gasket
- Recessed black plastic handles held in with a positive lock system
- Heavy duty leg rails that run the entire length of

the unit

- 6.12" adjustable full stainless steel legs and bullet feet
- 8' cord and plug supplied
- 36" standard work height
- Environmentally friendly HFC-404A refrigerant
- Interior cabinet is cooled with mullion style evaporator blower coils (coated) mounted between each door/drawer section for very even air and temperature control
- Interior refrigerator will maintain 36° to 40° temperatures at 100° ambient room temperature meeting NSF requirements
- One year parts and 90 day labor standard warranty.

## Options & Accessories

- Stainless steel end
  - Stainless steel back
  - Laminate facing (full front)
  - Laminate end
  - Laminate back
  - Cutting board
  - Tray rack
  - Drawers in lieu of one door
  - Locks
  - Fixed and adjustable height casters
  - 220V/50 cycle\*
- \* Inclusion of this option will alter the electrical specifications of the unit

980 S. Isabella Rd.  
Mt. Pleasant, Michigan 48858


Phone: 800-733-8948 or 989-773-7981  
Fax: 800-669-0619

[www.delfield.com](http://www.delfield.com)




# F18WC


NOTE: Unobstructed airflow must be maintained to insure unit performance and maintain warranty.




Plan View  
18WC39




Plan View  
18WC47




Plan View  
18WC52




Elevation View  
18WC39




Elevation View  
18WC47




Elevation View  
18WC52




Plan View  
18WC60

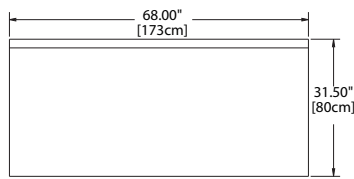


Plan View  
18WC68

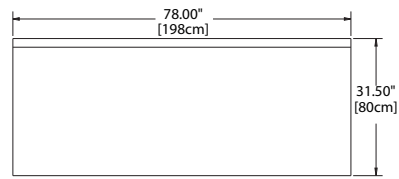


Plan View  
18WC78




Elevation View  
18WC60

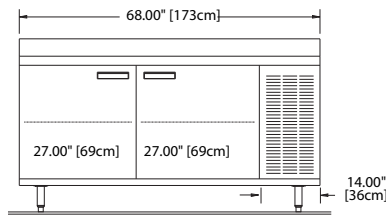


Elevation View  
18WC68

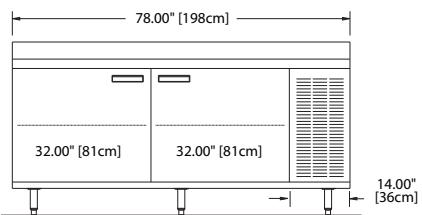


Elevation View  
18WC78

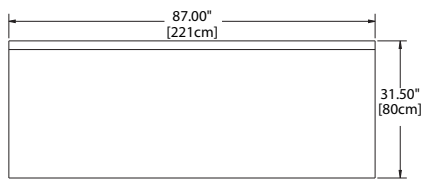


Plan View  
18WC87

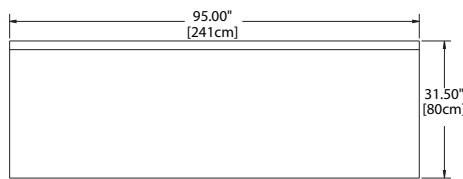


Plan View  
18WC95

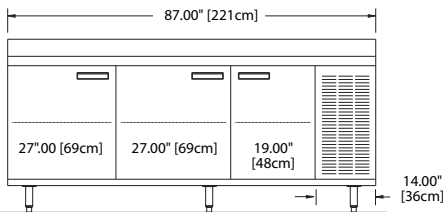


Elevation View  
18WC87

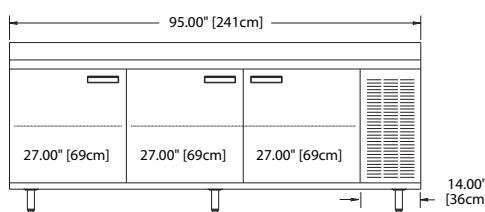

Elevation View  
18WC95



End View  
All Models

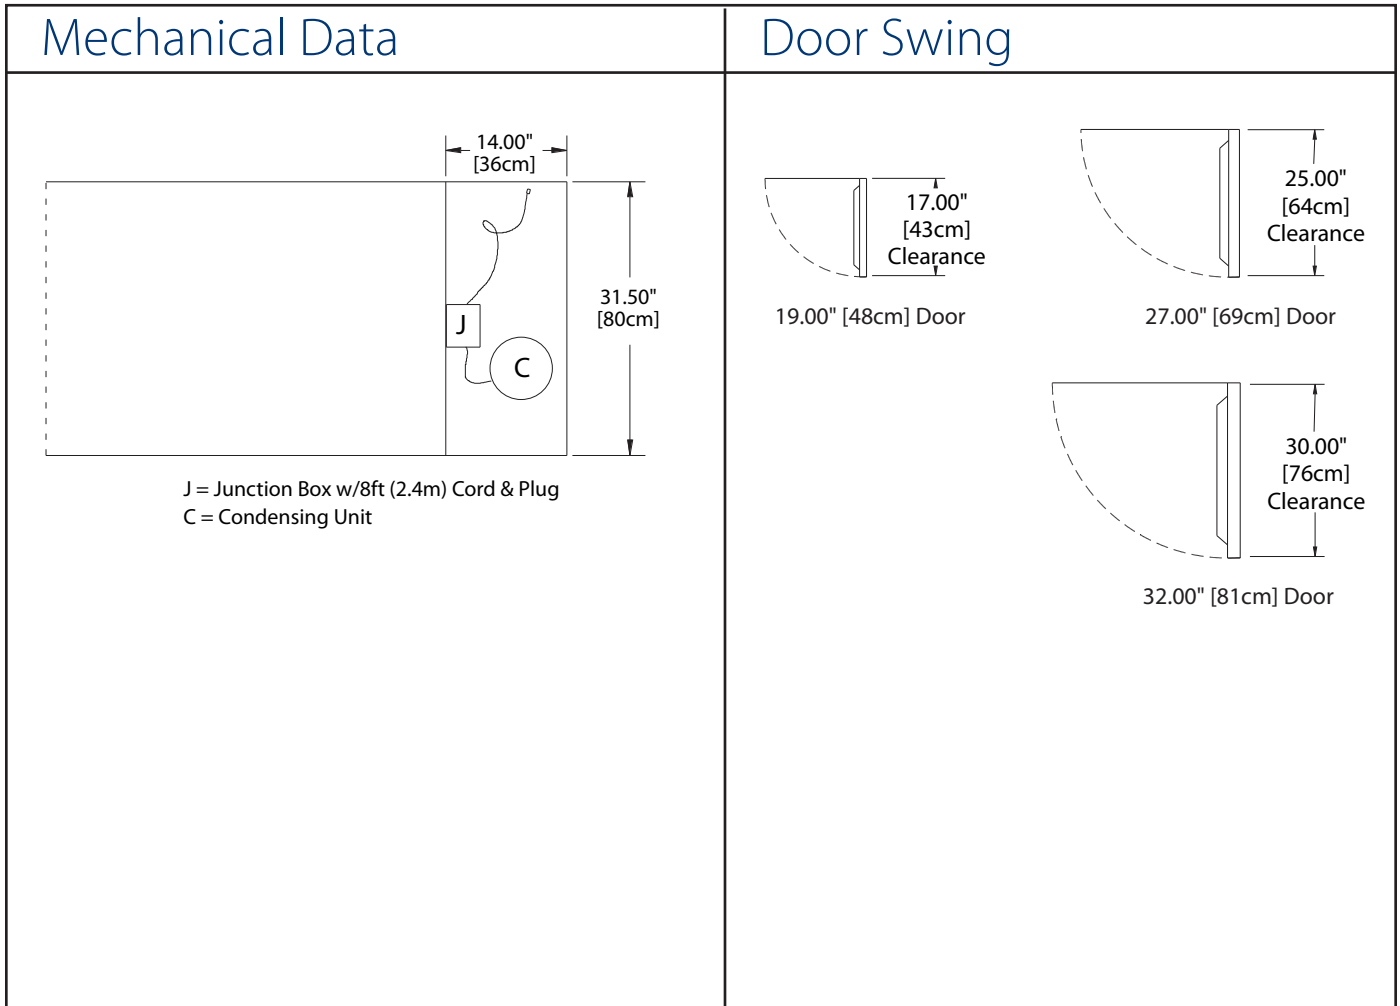

## F18WC

Model	Number Of Doors	Volume Ft <sup>3</sup>	Shelf Area Ft <sup>2</sup>	H.P.	V/Hz/Ph	Amps	NEMA Plug	Ship Weight Lbs/Kg	BTU Load	BTU System	Energy KWH/Day
F18WC39	(1) 19"	6.99	2.56	1/5	115/60/1	8.0	5-15P	365/166	383	1462	1.65
F18WC47	(1) 27"	9.77	3.95	1/5	115/60/1	8.0	5-15P	390/177	465	1462	1.9
F18WC52	(2) 19"	11.52	5.12	1/5	115/60/1	8.0	5-15P	420/191	605	1462	1.9
F18WC60	19" & 27"	14.31	6.51	1/5	115/60/1	8.0	5-15P	435/197	686	1462	1.94
F18WC68	(2) 27"	17.79	7.90	1/4	115/60/1	10.0	5-15P	495/225	768	2263	1.71
F18WC78	(2) 32"	20.59	9.64	1/4	115/60/1	10.0	5-15P	515/234	869	2263	2.2
F18WC87	(2) 27" & 19"	23.05	10.29	1/4	115/60/1	10.0	5-15P	535/243	1050	2263	2.72
F18WC95	(3) 27"	25.82	11.85	1/4	115/60/1	10.0	5-15P	615/279	1131	2263	2.9

Delfield reserves the right to make changes to the design or specifications without prior notice.



# F18WC

31.5" (80cm) Deep Self-Contained Refrigerated Work Tables

## Specifications

**Exterior top** is constructed of one-piece stainless steel, with integral 2.12" (5.4cm) high square nosing at the front, and 4" (10.2cm) high by 2" (5.1cm) deep backsplash at the rear. Top is insulated with 2" (5.1cm) of high-density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane.

**Exterior back** and bottom are galvanized steel. Exterior ends are galvanized steel.

**Base interior** has stainless steel back and bottom. Interior ends and door frames are thermoformed ABS plastic. Base is insulated with 1.5" (3.8cm) of high-density foamed-in-place polyurethane.

**Door(s)** have a stainless steel exterior front, with a thermoformed ABS plastic interior liner. Door(s) have black recessed handle(s) and a snap-in magnetic gasket which is easily replaceable. Each interior door section has (1) removable epoxy-coated wire shelf.

**Base** has a machine compartment, standard on right, with a condensing unit with condensate evaporator and an electrical junction box installed. Machine compartment has a removable louver for access to condensing unit. Blower coil(s) are located behind the door mullions. Refrigeration system uses HFC-404A refrigerant, and will maintain 36°F (2°C) to 40°F (4°C) interior cabinet temperature.

Unit is mounted on 6.13" (15.6cm) high adjustable stainless steel legs.

**Electrical connections** are 115 volts, 60 Hertz, single phase. Unit has a 8' (2.4m) long cord and plug.

