Delfield

F18FR

31.50" (80cm) Deep Remote Freezer Base Work Tables

Project _____

Item _____

Quantity _____

CSI Section 11400

Approved _____

Date _____

F18FR: 31.50" (80cm) Deep Remote Freezer Base Work Tables

Models

- F18FR35 - 35" remote freezer work table
- F18FR50 - 50" remote freezer work table
- F18FR58 - 58" remote freezer work table
- F18FR66 - 66" remote freezer work table
- F18FR76 - 76" remote freezer work table

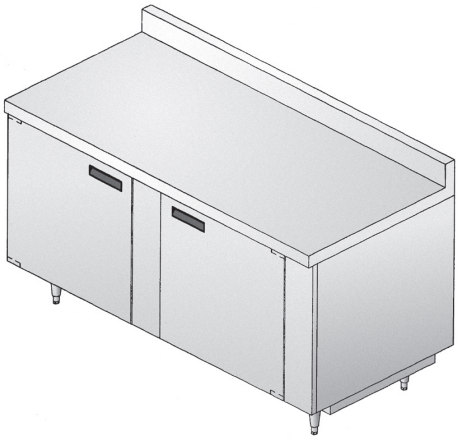

F18FR66

Standard Features

- Standard heavy duty units have unfinished ends
- 16-gauge stainless steel top construction
- Interior sub-top is made of stainless steel
- 2BF stainless steel refrigerated base interior back and bottom
- High density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane foam insulation
- Freezer base fronts are made of .095" thick ABS plastic backed by rigid polyurethane water blown injection molded frames. (NO WOOD)
- One epoxy coated shelf for each door
- Exterior drawer fronts are stainless steel with ABS plastic liner
- Snap-in dart style vinyl magnetic gasket
- Recessed black plastic handles held in with a positive lock system
- 14-gauge leg rails that run the entire length
- 6.12" adjustable stainless steel legs and bullet feet
- Environmentally friendly HFC-404A refrigerant
- Interior cabinet is cooled with mullion style evaporator blower coils (coated) mounted between each door/drawer section for very even air and temperature control
- Interior freezer base cabinet will maintain 0° to -5° temperatures at 100° ambient room temperature. Supplied standard with defrost timer
- One year parts and 90 day labor standard warranty

Options & Accessories

- Electric condensate evaporators
- Stainless steel end or back
- Laminate facing (full front)
- Laminate end or back
- Cutting board
- Condensate evaporator (1 per coil)
- Tray rack
- Drawers in lieu of one door, 19", 27" or 32"
- Locks
- 230V/50 cycle*

* Inclusion of this option will alter the electrical specifications

Specifications

Exterior Top to be constructed of one piece 16-gauge stainless steel, with integral 2.12" (5.4cm) square nosing on front and 4" (10.2cm) high by 2" (5.1cm) thick backsplash on rear. Top to be insulated with 2" (5.1cm) high density insulation.

Base interior to have 22-gauge stainless steel back and bottom. Interior ends and door frames to be thermoformed ABS plastic. Base to be insulated with 1.50" (3.8cm) high density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) foamed in place polyurethane.

Exterior back and bottom of base to be 24-gauge galvanized steel. Exterior ends to be constructed of 18-gauge galvanized steel.

Door(s) have a thermoformed ABS plastic interior liner and 22 gauge stainless steel exterior front. Door(s) have black recessed handle(s) and a snap-in magnetic gasket which is easily replaceable. Unit to be furnished with (1) epoxy coated wire shelf for each door section.

Base to be furnished with blower coil with coil housing to enclose expansion valve and fans. Unit is provided with defrost timer, thermostat and solenoid valve in mechanical section. Unit is designed to maintain 0°F (-18°C) to -5°F (21°C).

Unit is mounted on 6.13" (15.6cm) high adjustable stainless steel legs.

Recommended refrigerant - HFC-404A

Electrical connections are 115 volt, 60 Hertz, single phase. Unit must be hard wired.

404A REFRIGERANT

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981
Fax: 800-669-0619

www.delfield.com

Manitowoc

Delfield

31.50" (80cm) Deep Remote Freezer Base Work Tables

F18FR



Plan View
All Models



Elevation View
F18FR35



Elevation View
F18FR50

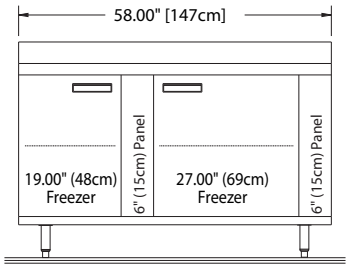

Elevation View
F18FR58

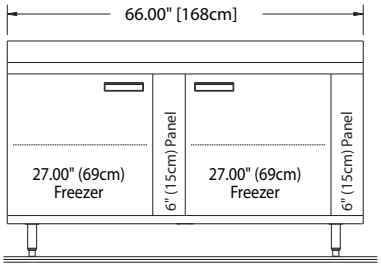

Elevation View
F18FR66

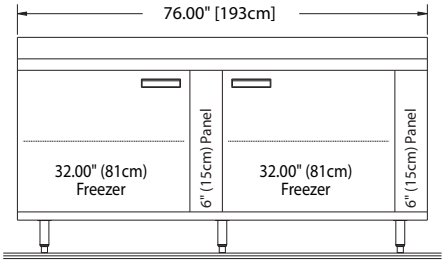

Elevation View
F18FR76

Mechanical Data



Elevation View
F18FR35



Elevation View
F18FR50, F18FR58,
F18FR66, F18FR76

J = Junction box
R = Refrigeration lines
1/4" liquid, 3/8" suction
D = Drains 1/2"

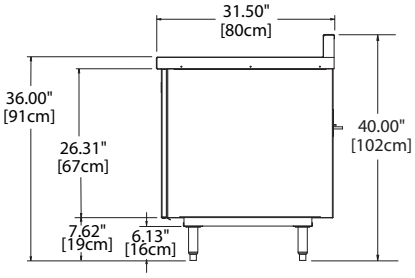

End View
All Models



19.00" [48cm] Door



27.00" [69cm] Door



32.00" [81cm] Door

Specifications

Model	Number Of Doors	Storage ft^3	Shelf Area ft^2	H.P.	V/Hz/Ph	Amps	Ship Weight lbs/kg	BTU Load	Evap Cap. BTU/°TD
F18FR35	(1) 19"	5.58	2.56	1/3*	115/60/1	10.0	310/140	943	160
F18FR50	(2) 19"	12.21	5.12	1/2*	115/60/1	10.0	370/168	1471	160
F18FR58	19" & 27"	15.00	6.51	3/4*	115/60/1	10.0	400/181	1844	160
F18FR66	(2) 27"	17.79	7.90	3/4*	115/60/1	10.0	425/193	2020	160
F18FR76	(2) 32"	21.28	9.64	3/4*	115/60/1	10.0	450/204	2437	160

*Recommended horsepower, compressor not supplied on remote units

Delfield reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981
Fax: 800-669-0619
www.delfield.com

Printed in the U.S.A.
DSF18FR
08/11

Manitowoc