

## CV15E

Blast Chiller/Shock Freezer



Blast chiller



Ice cream



Conservation  
cycle



Thawing



Hot gas  
defrosting



Chilling  
programs



Data  
storage



### Standard Features

- 4 different cycles for blast chilling and 4 for shock freezing
- Hot gas defrost
- Capacitive Touch control
- Functions available: Blast chiller, Shock freezing, Shock freezing continuous, thawing, ice cream cycle, cycle programs storable, HACCP report alarms
- Stainless steel construction
- Upload and Download data with USB
- Unit must be hardwired - no cord/plug supplied
- Condensation pan standard - factory recommends to run unit to floor drain (or pan will need to be emptied after each cycle completes)

### Options & Accessories

- Sanitizing ozone cycle
- Castor kit
- Adapter mount for oven

### Capacity



**143 lbs**  
+194°F -> +37.4°F  
**65 kg**  
+90°C -> +3°C



**110 lbs**  
+194°F -> +37.4°F  
**50 kg**  
+90°C -> +18°C


**15**

12"x20" Pans



| Code number                                                     | Value                          |
|-----------------------------------------------------------------|--------------------------------|
| Power Supply                                                    | 208-240V/3/60Hz                |
| Outside length                                                  | 33.07" / 840 mm                |
| Depth (with handle)                                             | 34.64"(36.61") / 880 (930) mm  |
| Height (with legs)                                              | 76.85"(78.74") / 1952 (2002)mm |
| Capacity                                                        | 15                             |
| Compressor / HP                                                 | 3.6HP                          |
| Output chilling (+90°C/+3°C) (+194°F -> +37.4°F)                | 65kg / 143lbs                  |
| Output freezing (+90°C/-18°C)(+194°F -> +37.4°F)                | 50kg / 110lbs                  |
| Minimum circuit ampacity MCA/ Maximum overcurrent protector MOP | 23 A / 60 A                    |
| Refrigeration power (-10°C/+45°C)                               | 8460 W                         |
| Refrigerant gas type                                            | R404A (GWP 3922)/88.2 oz       |
| Noise level                                                     | 68 dBA                         |
| Net/Gross weight                                                | 564/624 lbs                    |
| Shipment data (WxDxH)                                           | 34.65"x38.58"x85.04" / 624lbs  |

## Dimensions

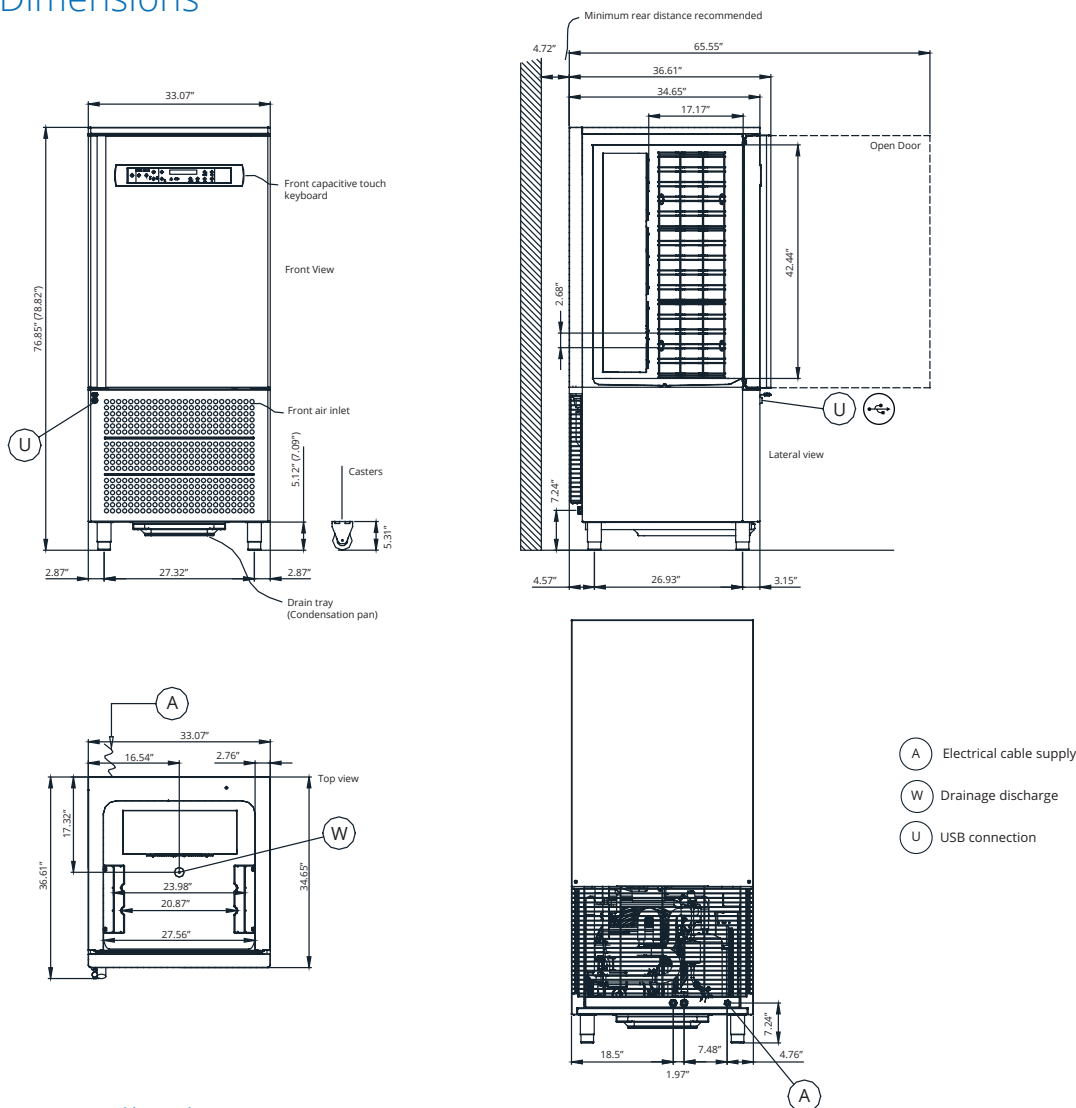

## Controller layout



Welbilt reserves the right to make changes to the design or specifications without prior notice.