


-PROVIDE CAFETERIA STYLE TOP WITH REINFORCED PLASTIC LAMINATE BACK
* MANUFACTURER: *VERIFY*
* LAMINATE COLOR: *VERIFY*
* GRAIN DIRECTION: *VERIFY*


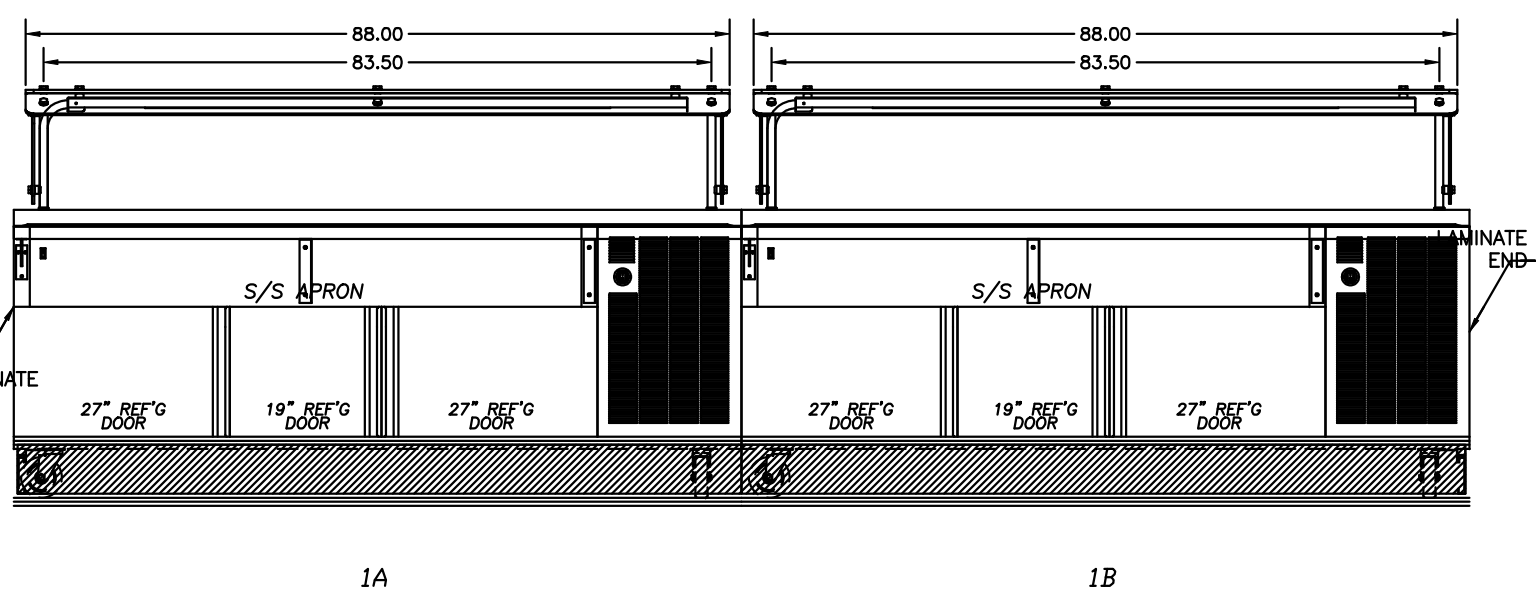


SKU NO. 000-20114DXD1
MODEL NO. 18MC91P ITEM NO. 1A
-SELF CONTAINED REF'G MEGA TOP
-WORK TABLE
-36" 1/6 SIZE PANS 6" DEEP BY OTHERS
-ADAPTER BARS BY OTHERS
-HINGED REMOVABLE COVER
-200" DIA. HOLE FOR ACCESS TO POWER SWITCH IN LOWERED PANEL
-33"X-41" STORAGE IN TOP OPENINGS
-36"X-40" STORAGE IN BASE
-115V-60C-1PH-88A-1/3HP & 1/5HP
-REF'G PACKAGE, R290
-BASE PROVIDED WITH EXPANSION VALVE, SOLENOID VALVE, AND THERMOSTATIC CONTROL
-COLD PAN PROVIDED WITH EXPANSION VALVE, THERMOSTATIC CONTROL, AND SOLENOID VALVE WITH ON/OFF SWITCH
-FULL LAMINATE FRONTS
* MANUFACTURER: *VERIFY*
* LAMINATE COLOR: *VERIFY*
* GRAIN DIRECTION: *VERIFY*
-2" S/S CONSTRUCTED ROLLED "V" TRAY SLIDE
-MOUNTED ON FIXED BRACKETS
-S/S KICK PLATE ON BOTH SIDES
-WITH LEFT END RETURN ONLY

SKU NO. 000-CCA14DXD3
MODEL NO. DCFSD ITEM NO. FS-1A
-SINGLE TIER, DOUBLE SERVICE
-FIXED SNEEZE GUARD FRONTS
-SUPPORTS WITH S/S FINISH
-AND MOUNTING HARDWARE
-0.38 TEMPERED GLASS TOP
-0.25 TEMPERED GLASS FRONT AND ENDS
-1) 36.00 LED LIGHT
(120V-0.12A)

SKU NO. 000-20114DXD2
MODEL NO. 18MC91P ITEM NO. 1B
-SELF CONTAINED REF'G MEGA TOP
-WORK TABLE
-36" 1/6 SIZE PANS 6" DEEP BY OTHERS
-ADAPTER BARS BY OTHERS
-HINGED REMOVABLE COVER
-200" DIA. HOLE FOR ACCESS TO POWER SWITCH IN LOWERED PANEL
-33"X-41" STORAGE IN TOP OPENINGS
-36"X-40" STORAGE IN BASE
-115V-60C-1PH-88A-1/3HP & 1/5HP
-REF'G PACKAGE, R290
-BASE PROVIDED WITH EXPANSION VALVE, SOLENOID VALVE, AND THERMOSTATIC CONTROL
-COLD PAN PROVIDED WITH EXPANSION VALVE, THERMOSTATIC CONTROL, AND SOLENOID VALVE WITH ON/OFF SWITCH
-FULL LAMINATE FRONTS
* MANUFACTURER: *VERIFY*
* LAMINATE COLOR: *VERIFY*
* GRAIN DIRECTION: *VERIFY*
-2" S/S CONSTRUCTED ROLLED "V" TRAY SLIDE
-MOUNTED ON FIXED BRACKETS
-S/S KICK PLATE ON BOTH SIDES
-WITH RIGHT END RETURN ONLY

SKU NO. 000-CCA14DXD4
MODEL NO. DCFSD ITEM NO. FS-1B
-SINGLE TIER, DOUBLE SERVICE
-FIXED SNEEZE GUARD FRONTS
-SUPPORTS WITH S/S FINISH
-AND MOUNTING HARDWARE
-0.38 TEMPERED GLASS TOP
-0.25 TEMPERED GLASS FRONT AND ENDS
-1) 36.00 LED LIGHT
(120V-0.12A)

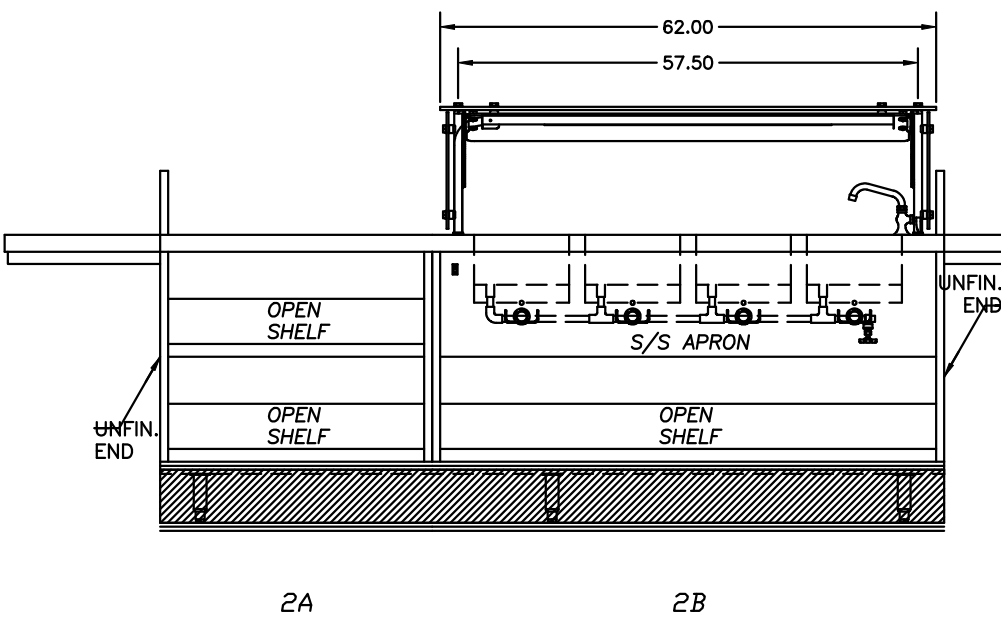
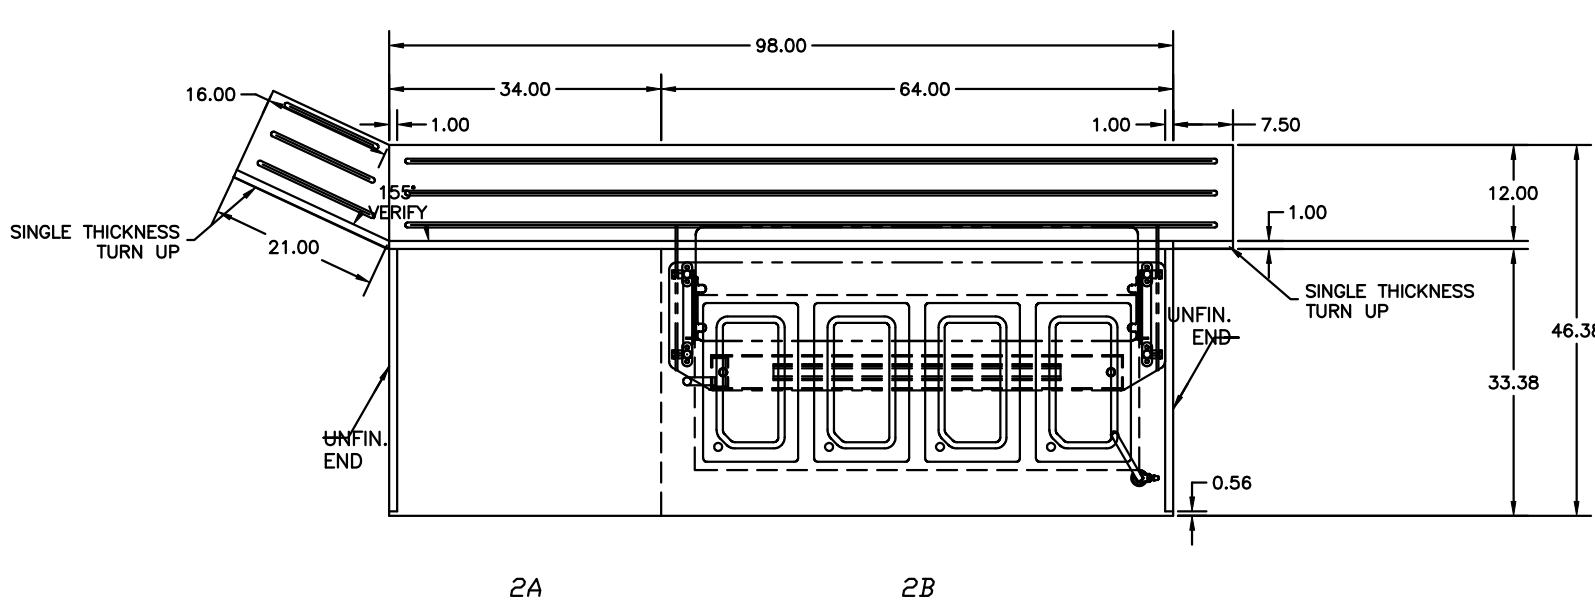


SKU NO. 000-20114DXD5
MODEL NO. 16DS34 ITEM NO. 2A
-OPEN SHELF UTILITY STAND
-SERVICE FLEXIBLE FOOD SHIELD
-CONVERTS TO THREE POSITIONS
-SUPPORTS WITH S/S FINISH
-AND MOUNTING HARDWARE
-0.38 TEMPERED GLASS TOP
-0.25 TEMPERED GLASS FRONT AND ENDS
-1) 36.00 LED LIGHT
(120V-0.12A)


SKU NO. 000-CCA14DXD6
MODEL NO. DCFSD ITEM NO. FS-2B
-SINGLE TIER, SINGLE SERVICE FLEXIBLE FOOD SHIELD
-CONVERTS TO THREE POSITIONS
-SUPPORTS WITH S/S FINISH
-AND MOUNTING HARDWARE
-0.38 TEMPERED GLASS TOP
-0.25 TEMPERED GLASS FRONT AND ENDS
-1) 36.00 LED LIGHT
(120V-0.12A)

-PROVIDE CAFETERIA STYLE TOP WITH REINFORCED PLASTIC LAMINATE BACK
* MANUFACTURER: *VERIFY*
* LAMINATE COLOR: *VERIFY*
* GRAIN DIRECTION: *VERIFY*


HOT SECTION 1

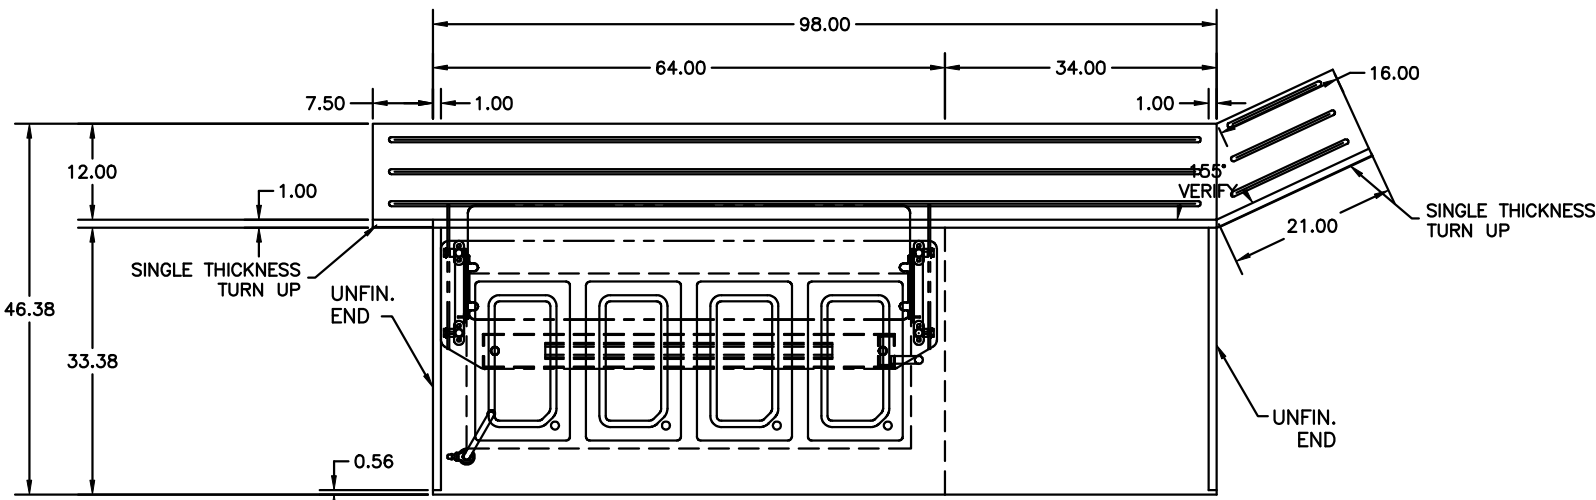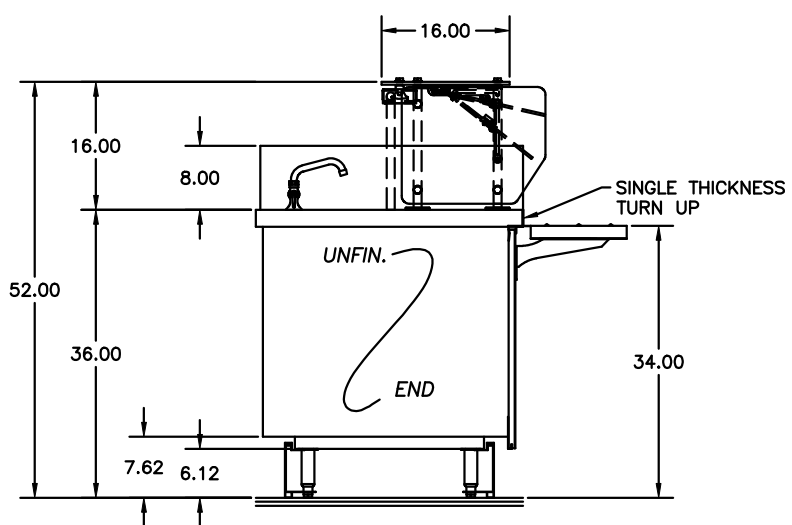

HOT SECTION 2

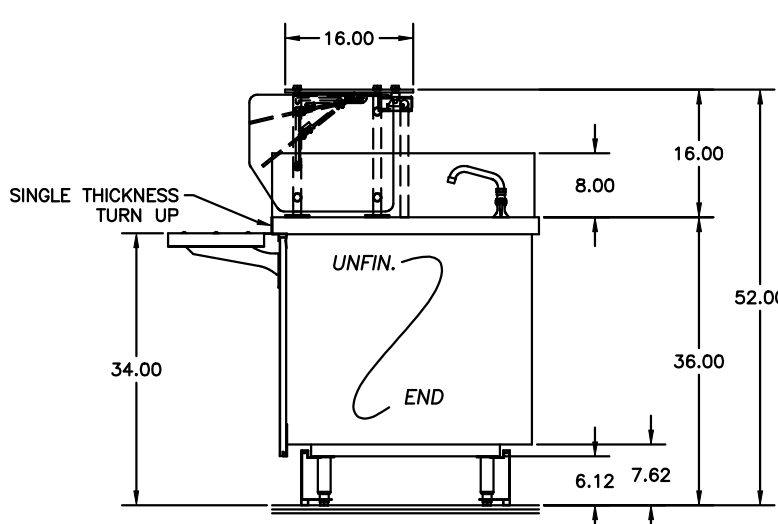


-PROVIDE CAFETERIA STYLE TOP WITH REINFORCED PLASTIC LAMINATE BACK
* MANUFACTURER: *VERIFY*
* LAMINATE COLOR: *VERIFY*
* GRAIN DIRECTION: *VERIFY*

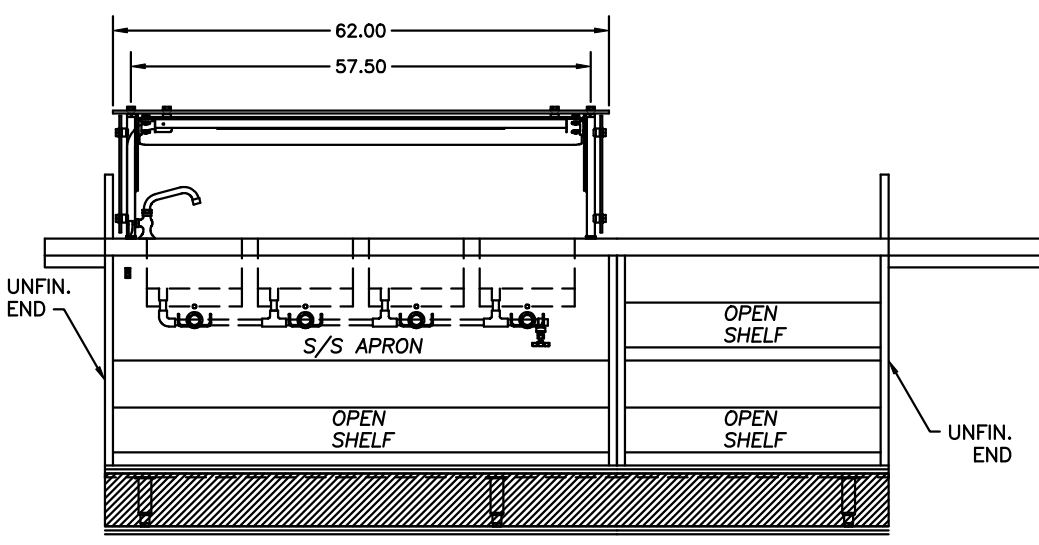



SKU NO. 000-CCA14DXD8
MODEL NO. DCFSD ITEM NO. FS-3A
-SINGLE TIER, SINGLE SERVICE FLEXIBLE FOOD SHIELD
-CONVERTS TO THREE POSITIONS
-SUPPORTS WITH S/S FINISH
-AND MOUNTING HARDWARE
-0.38 TEMPERED GLASS TOP
-0.25 TEMPERED GLASS FRONT AND ENDS
-1) 36.00 LED LIGHT
(120V-0.12A)

SKU NO. 000-20114DXD7
MODEL NO. 20SS64 ITEM NO. 3A
-TOP EXTENSION WITH S/S SIDES
-MODEL NO. 1038D
-BUILT-IN N8759-D ELECTRIC HOT FOOD UNIT WITH INDIVIDUALLY HEATED WELLS
-PROVIDE WITH DRAINS & VALVE
-HOLDS 4) 12" X 20" PANS (BY OTHERS)
-MEETS NSF 4 REQUIREMENTS
-208/230V-60C-1PH-200/220A
-MANUAL FILL FAUCET
-S/S CONSTRUCTED ROLLED "V" TRAY SLIDE
-MOUNTED ON FIXED BRACKETS
-S/S KICK PLATE ON BOTH SIDES
MODEL NO. 16DS34 ITEM NO. 3B
-OPEN SHELF UTILITY STAND

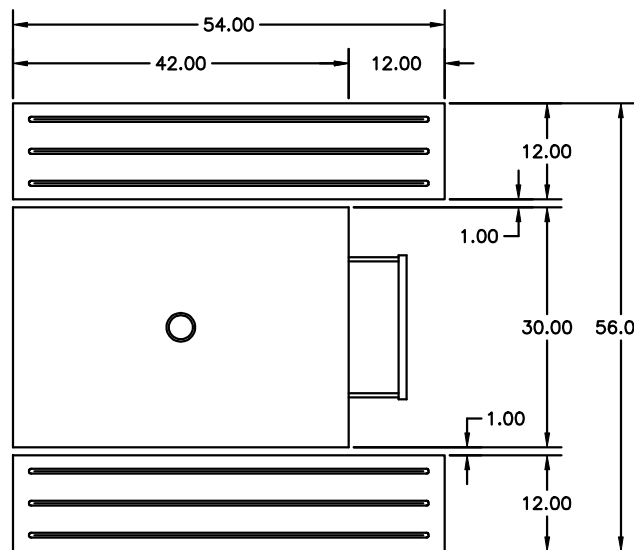

(4) REQUIRED
(1) SHOWN

SKU NO. 000-40014DXD9
MODEL NO. SC3-30 ITEM NO. 3
-CASHIER COUNTER
-3 IN. DIAMETER HOLE WITH GROMMET IN TOP
-S/S SHELF AND LOCKING DRAWER
-1) 120V-15A DUPLEX (GFCI) RECEPTACLE, NEMA #5-15R WITH 100A BREAKER
CORD AND PLUG INFORMATION
-NEMA #5-15 PLUG WITH 9FT CORD
115V-60C-1PH-100A
-2) S/S CONSTRUCTED ROLLED "V" TRAY SLIDE
-MOUNTED ON FOLD-DOWN BRACKETS

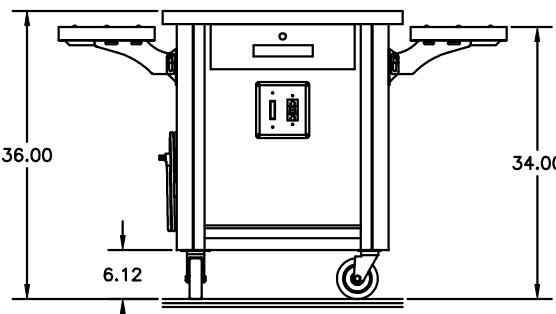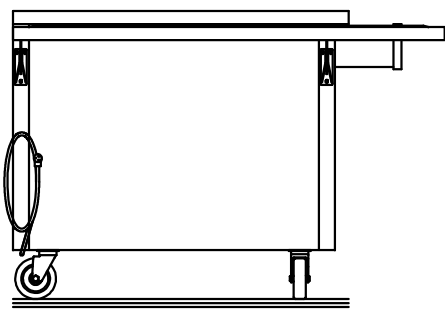

APPROVED FOR FABRICATION

☐ APPROVED
☐ APPROVED AS NOTED
☐ RESUBMIT

COMPANY: _____ DATE: _____

****ELECTRICAL NOTICE****

APPROVER OF FABRICATION AS DRAWN HEREIN ACKNOWLEDGES THE ELECTRICAL SPECIFICATIONS DEPICTED AND/OR NOTED CANNOT BE MODIFIED ONCE MANUFACTURING HAS BEGUN. ANY ALTERATIONS OF THE EQUIPMENT AFTER MANUFACTURING WILL VOID ALL WARRANTIES AND UL CERTIFICATION ON SAID EQUIPMENT. ANY EQUIPMENT ALTERED AFTER MANUFACTURING WILL BE SUBJECT TO UL REVIEW AND APPROVAL AT OWNER'S EXPENSE.

If you are placing equipment into an area which has certain standards or codes other than those normally accepted in the food - service industry (NSF, UL, etc.) Delfield must be advised of those specifications in detail before fabrication of the equipment in order that we may quote additional costs. If any, failure to notify the Delfield Company before fabrication releases us from any obligation to modify our standards without any additional charges.

COMPONENT CRAFTED CUSTOM EQUIPMENT

GENERAL NOTES:

-EXAMINE THIS DRAWING AND RESPOND TO NOTES IF APPLICABLE
-ALL NOTES ARE STANDARD UNLESS OTHERWISE SPECIFIED

FABRICATION:

-ALL LO-PRO TOPS TO BE 18 GAUGE S/S
-ALL OTHER TOPS TO BE 18 GAUGE S/S WITH 14 GAUGE BRACING
-ALL EQUIPMENT FRONTS TO BE STAINLESS STEEL
-SUB-BRACING AND DOUBLE HEADED WISING FOR ADDED STRENGTH
-CONSTRUCTION ADHESIVE IS USED ON ALL TOP AND SHELF BRACING FOR ADDED STRENGTH AND SOUND DEADENING
-ALL LEGS ARE 6.00" ADJUSTABLE HEIGHT, S/S AND MOUNTED ON 1.50" LEG RAILS

VERIFICATION:

-VERIFY SPACING OF SLIDES IN ALL BACK CABINETS
-VERIFY VOLTAGE & AMP RATINGS ON ALL ELECTRICAL OUTLETS
-VERIFY VOLTAGE REQUIRED ON HOT FOOD TABLES, LIGHTS, ETC.
-VERIFY MAKE/MODEL, ELECTRICAL AND INSTALLATION REQUIREMENTS OF ALL DISPENSERS, DROP-IN, ROLL WAINERS, ETC.
-WHEN PLACING DISPENSERS IN TOP EXTENSIONS ONLY, ORDER DISPENSERS NO LONGER THAN 28.00"

ELECTRICAL:

-ALL FIELD WIRING JUNCTION BOXES ARE LOCATED SO THE BOXES CAN BE EXAMINED FROM THE FRONT SIDE OF THE COUNTER, AND THE CONNECTIONS CAN BE EXAMINED WITHOUT DISTURBING THE WIRING OF THE APPLIANCE
-ALL 120 VOLT RECEPTACLES (15 AND 20 AMP) WILL BE GFCI PROTECTED DUPLEXES
-ALL LINE-UPS WILL BE HARDWIRED IN FIELD

REMOTE REFRIGERATION:

-REMOTE REFRIGERATORS ARE SUPPLIED WITH EXPANSION VALVE, SOLENOID VALVE, AND THERMOSTAT
-REMOTE FREEZERS ARE SUPPLIED WITH EXPANSION VALVE, SOLENOID VALVE, THERMOSTAT, AND DEFROST TIMER
-ALL OTHER CONTROLS ARE SUPPLIED BY OTHERS
-DROP-IN COLD PANS ARE SUPPLIED WITH EXPANSION VALVE AND COUNTERY PROBE TUBE

OVERSTRUCTURE-HEATLAMP:

-SHELF HEIGHTS OF 19" RECOMMENDED TO ALLOW MINIMUM 14" CLEARANCE BETWEEN HEATLAMPS AND SHELF BELOW
-ALL HANGING HEATLAMPS MUST MEET MINIMUM 14" CLEARANCE BETWEEN HEATLAMP AND TOP SHELF


ENVIRONMENTALLY FRIENDLY INSULATION

-KYOTO PROTOCOL COMPLIANT
-NON O.D.P. (OZONE DEPLETION POTENTIAL)
-NON G.W.P. (GLOBAL WARMING POTENTIAL)
-POLYURETHANE INSULATION

Shelleysteel®

NOTES:

- * TOPS ARE TO BE 14 GAUGE S/S
- * PROVIDE INTERLOCKS AS REQUIRED
- * ALL STANDARD LOCKING POLYURETHANE CASTERS
- * CORDS STANDARD WITH 90° PLUGS
- * UNITS SPECIFIED WITH DRAINS TO HAVE GATE VALVE AND GARDEN HOSE HOOK UP
- * WHEN TRAY SLIDE/WORK SHELF BRACKETS ARE USED: FOLD DOWN BRACKETS ARE STANDARD UNLESS OTHERWISE REQUESTED
- * ALL 120 VOLT RECEPTACLES (15 AND 20 AMP) WILL BE GFCI PROTECTED DUPLEXES
- * ENVIRONMENTALLY FRIENDLY INSULATION
- * KYOTO PROTOCOL COMPLIANT
- * NON O.D.P. (OZONE DEPLETION POTENTIAL)
- * NON G.W.P. (GLOBAL WARMING POTENTIAL)
- * POLYURETHANE INSULATION
- * SHELLEYSSTEEL (LAMINATED): PROVIDE ANGULAR FRAME BASES WITH LAMINATE SIDE PANELS
- * MANUFACTURER: *VERIFY*
- * MODEL: *VERIFY*
- * FINISH: *VERIFY*
- * DESCRIPTION: *VERIFY*
- * GRAIN DIRECTION: *VERIFY*

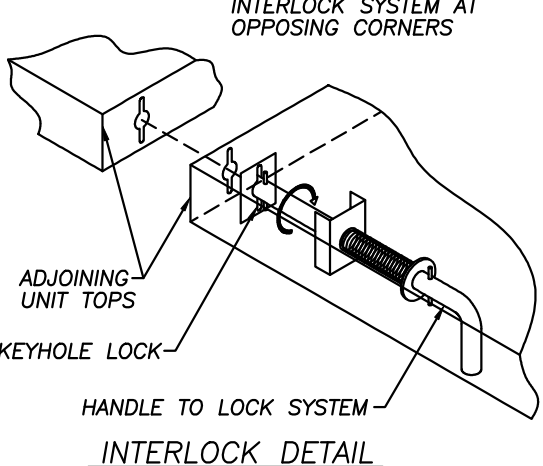

Delfield®