

F16OS

31.5" (80cm) Deep Open Shelf Utility Stands

F16OS

Models

- F16OS36 - 36" length open shelf utility stand
- F16OS48 - 48" length open shelf utility stand
- F16OS60 - 60" length open shelf utility stand
- F16OS72 - 72" length open shelf utility stand
- F16OS84 - 84" length open shelf utility stand
- F16OS96 - 96" length open shelf utility stand



F16OS48

Standard Features

- Top is constructed of 16-gauge stainless steel
- Work height is 36"
- Two pieces of 14-gauge U-channel are welded and glued under the top for strength and sound deadening
- Two shelves constructed of stainless steel with double hemmed nosing with bracing under center shelf and under bottom shelf and sound-deadening adhesive
- 14-gauge leg rails that run the entire length of the unit
- Units are standard with unfinished ends
- One year parts and labor standard warranty

Options & Accessories

- Stainless steel back
- Stainless steel end
- Laminate back
- Laminate end
- Fixed or adjustable height casters
- Urn trough


Specifications

Top is constructed of 16-gauge stainless steel, with integral 2.12" (5cm) square nosing on front and 4.00" (10cm) high by 2.00" (5cm) thick backsplash on rear.

Base has (2) 22-gauge stainless steel shelves. Shelves to have 5.62" (14cm) turn-up in rear. Shelf sides are constructed of stainless steel. Optional ends are constructed of 22-gauge stainless steel.

Legs: Unit is mounted on 6.13" (16cm) high adjustable stainless steel legs.



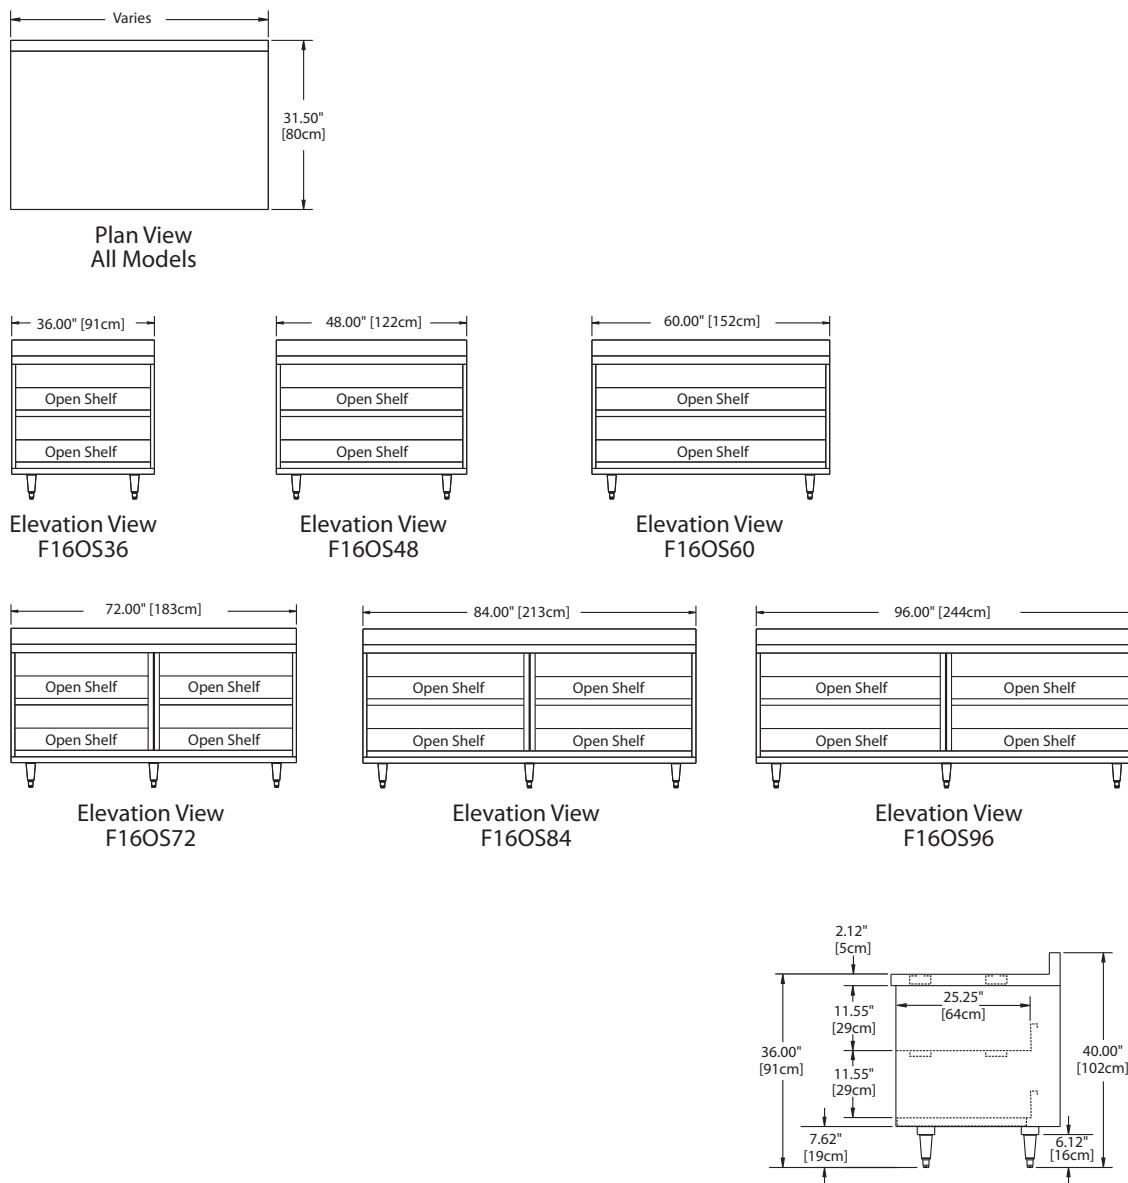

Specifications

Model	# Of Shelves	Shelves Capacity sq. ft.	Ship Weight
F16OS36	2	11.9	230lbs/104kg
F16OS48	2	16.1	270lbs/122kg
F16OS60	2	20.3	310lbs/140kg
F16OS72	2	24.5	350lbs/159kg
F16OS84	2	28.7	390lbs/177kg
F16OS96	2	32.9	430lbs/195kg

Welbilt reserves the right to make changes to the design or specifications without prior notice.