


N8100-BRP

Drop-In Curved Self-Contained Mechanically Cooled Cold Pans

Models

- N8144-BRP Mechanically cooled cold well, fits two standard 12" x 20" pans
- N8159-BRP Mechanically cooled cold well, fits three standard 12" x 20" pans
- N8176-BRP Mechanically cooled cold well, fits four standard 12" x 20" pans
- N8194-BRP Mechanically cooled cold well, fits five standard 12" x 20" pans

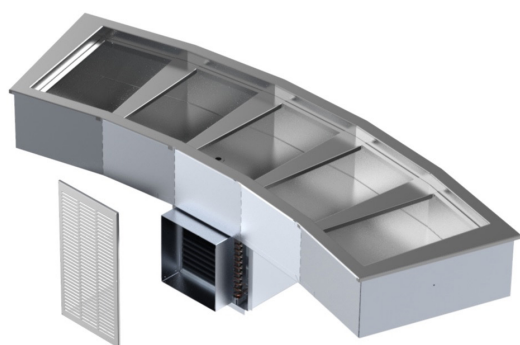

N8194BRP

Standard Features


- NSF-7 certified performance
- Stainless steel holding clips secure pans
- Environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane foam insulation
- Push-in perimeter gasket
- Stainless steel louver provided
- Environmentally friendly R290 refrigerant
- 1" drain standard
- Electronic for temperature control
- One year parts and labor standard warranty
- Lower cutout dimensions - 12"x23.5"

Options & Accessories


- Custom pan template
- Adapter bars
- Flexishield® food shields, single or dual service
- Relocate compressor
- Remote toggle switch assembly (shipped loose) (AS000-473-003W)

N8100-BRP: Drop-In Curved Self-Contained Mechanically Cooled Cold Pans


N8144-BRP

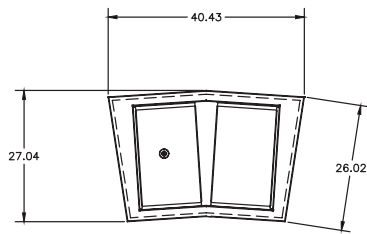


N8144-BRP Plan View

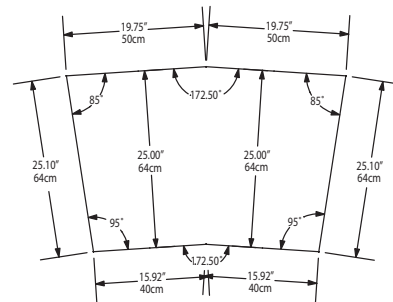

N8144-BRP Cutout Dimensions




N8144-BRP Elevation View

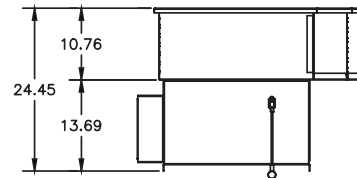


N8144-BRP Side View


N8159-BRP

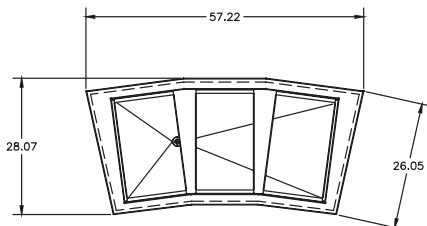


MODEL NO. N8159-BRP
N8159-BRP Plan View

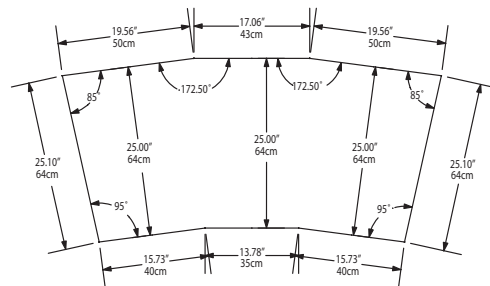

N8159-BRP Cutout Dimensions




N8159-BRP Elevation View

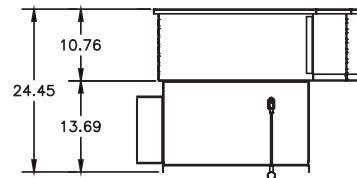


N8159-BRP Side View

Welbilt reserves the right to make changes to the design or specifications without prior notice.


N8176-BRP

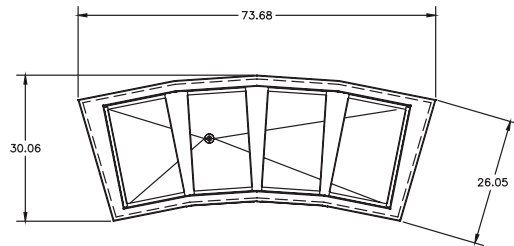


N8176-BRP Plan View

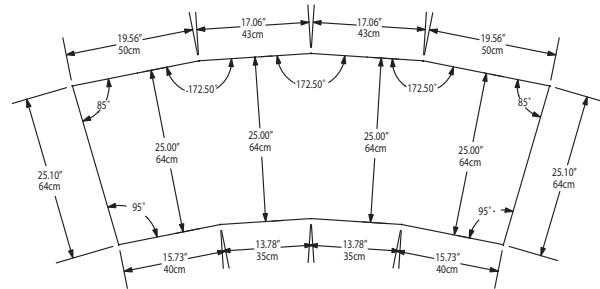

N8176-BRP Cutout Dimensions

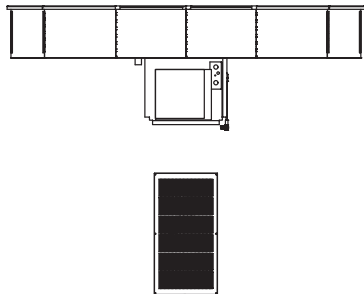


N8176-BRP Elevation View

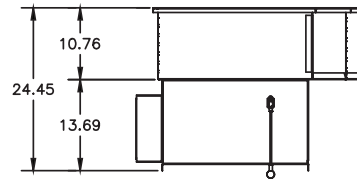


N8176-BRP Side View


N8194-BRP

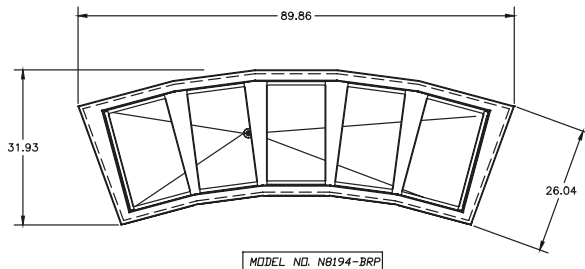


N8194-BRP Plan View

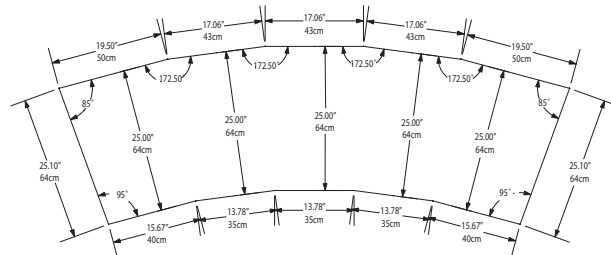

N8194-BRP Cutout Dimensions

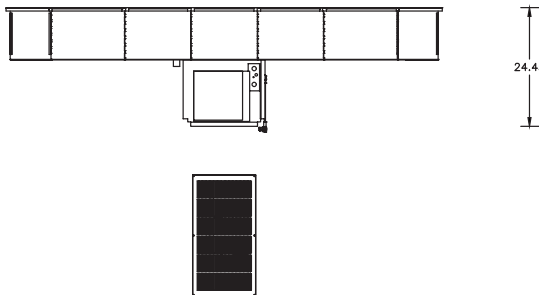

N8194-BRP Elevation View

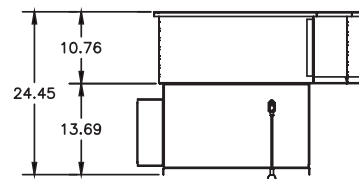

N8194-BRP Side View

Welbilt reserves the right to make changes to the design or specifications without prior notice.

N8100-BRP

Drop-In Curved Self-Contained Mechanically Cooled Cold Pans

Specifications

Top is one-piece 18-gauge stainless steel. Interior liner is 22-gauge stainless steel and is creased to a 1.00" (3cm) diameter drain. Stainless steel holding clips accommodate 12" x 20" (30cm x 51cm) pans 4" or 6" (10cm or 15cm) deep supplied by others. Product temperatures of 33°F (1°C) to 41°F (5°C) are maintained at 86°F (29°C) ambient room temperature, meeting NSF 7 requirements. Adapter bars are standard.

Sides and bottom are wrapped with refrigeration lines and insulated with high-density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) closed-cell polyurethane. Exterior housing is 24-gauge galvanized steel.

Condensing unit is suspended below the cold pan on a 16-gauge steel frame and uses R290 refrigerant. Electronic temperature control. Unit has an 8' (2.4m) cord and NEMA 5-15P plug.

A stainless steel louver is provided for field installation; cutout dimension is 12" x 23.5" (30cm x 60cm).

Specifications									
Model	Counter Cutout Dimensions	12"x20" Pan Capacity	V/Hz/Ph	Amps	H.P.	Nema Plug	BTU Load	System Capacity	Ship Weight
N8144-BRP		2	115/60/1	2.4	1/5	5-15P	455	779	161lbs/72kg
N8159-BRP		3	115/60/1	3.7	1/4	5-15P	670	1068	184lbs/83kg
N8176-BRP		4	115/60/1	3.7	1/4	5-15P	889	1192	233lbs/105kg
N8194-BRP		5	115/60/1	3.7	1/4	5-15P	1108	1297	243lbs/109kg



Welbilt reserves the right to make changes to the design or specifications without prior notice.