

## DriTec - ShelleySteel

Mobile dry hot serving counters

DriTec - ShelleySteel

### Models

- SFWH-1-NU 1 Low Watt Dry Hot Well Counter
- SFWH-2-NU 2 Low Watt Dry Hot Well Counter
- SFWH-3-NU 3 Low Watt Dry Hot Well Counter
- SFWH-4-NU 4 Low Watt Dry Hot Well Counter
- SFWH-5-NU 5 Low Watt Dry Hot Well Counter
- SFWH-6-NU 6 Low Watt Dry Hot Well Counter



SFWH-3-NU

### Standard Features

- NSF-4 certified for hot operation
- Wells operate independently for low watt hot operation
- Flush mount pans standard
- Dry operation only - No water required
- Control panel(s) with lighted on/off rocker switch and thermostatic temperature controls
- Stainless steel top and exterior body
- 14-gauge galvanized bottom
- High density environmentally friendly Kyoto Protocol compliant, Non-ODP (Ozone Depletion Potential), Non-GWP (Global Warming Potential) polyurethane foam throughout
- Cord and plug supplied standard
- 2-years parts and labor warranty, standard parts warranty
- Control panel(s) with 3-way hot/cold/off switch, thermostatic temperature controls for hot, cold and freeze operations with control guard(s)

### Options & Accessories

- Counter heights available from 28" to 36"
- Tray slides and work shelves
- Food shields
- Stainless steel overshell
- Understorage
- Adapter bars for fractional pans
- Recessed sheet pan option
- Décor packages
- Laminated exterior
- Cord hook (single or double)

### Specifications

**Top:** Exterior top is constructed of 14-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners.


**Interior:** Interior liner is constructed of aluminum with flush mount flange for low watt heating to accommodate up to 6" (15cm) deep 12"x20" pans, supplied by others. Dry operation only, no water required.

**Exterior body:** Exterior body is constructed of 18-gauge stainless side panels and 14-gauge galvanized bottom. All exterior side panels are reinforced with overlapping corners and are welded in place. All body cutouts are reinforced with 14-gauge galvanized channel supports.


**Operation:** Remote control panel contains a lighted On/Off power switch and thermostat for heated operation.

**Casters:** unit is mounted on 5" (13cm) diameter swivel casters with non-marking polyurethane casters and plate brakes. Overall height of caster assembly is 6" (15cm)





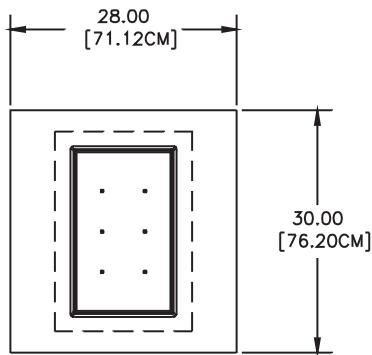


SFWH-1-NU

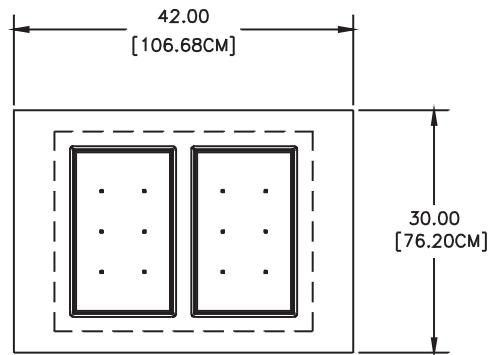


SFWH-2-NU




\*Shown with optional cord hook

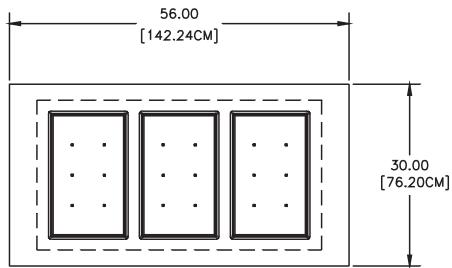



SFWH-3-NU

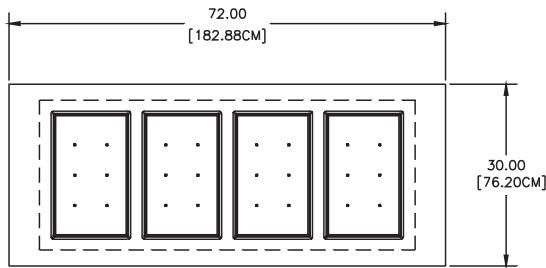

SFWH-4-NU




SFWH-5-NU

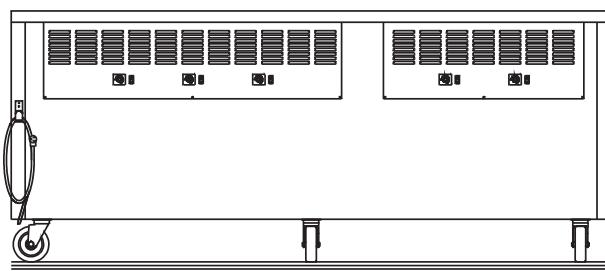
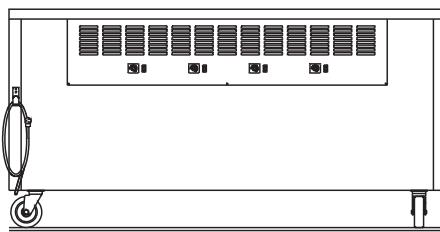


\*Shown with optional cord hook

Welbilt reserves the right to make changes to the design or specifications without prior notice.

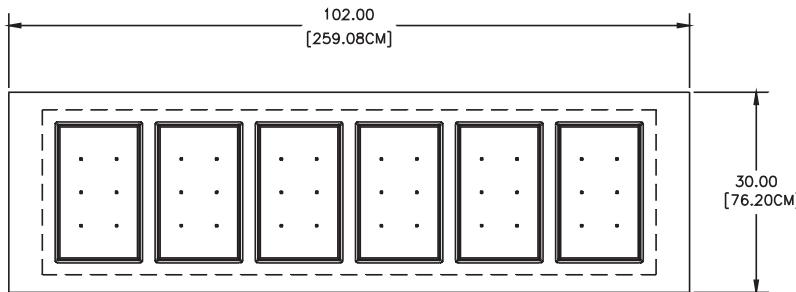

SFWH-6-NU

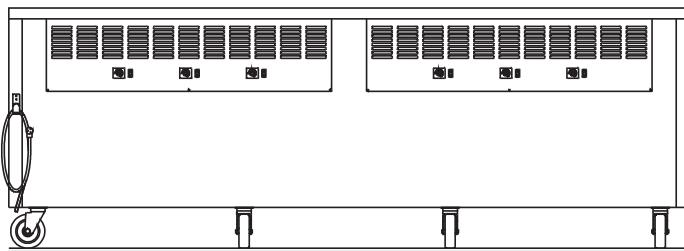

TYP END VIEW

\*Shown with optional cord hook

Specifications						
Model	12" x 20" Pan Capacity	Hot Electrical 500 watt per well, Amps per well	Nema Plug	BTU Load	System Capacity	Ship Weight
SFWH-1-NU	1	500 W, 208Y-240 V, 2.0 A	14-20P	331	870	300
SFWH-2-NU	2	(2) 500 W, 208Y-240 V, 4.0 A	14-20P	662	1740	380
SFWH-3-NU	3	(3) 500 W, 208Y-240 V, 6.0 A	14-20P	993	2610	460
SFWH-4-NU	4	(4) 500 W, 208Y-240 V, 8.0 A	14-20P	1324	3480	550
SFWH-5-NU	5	(5) 500 W, 208Y-240 V, 10.0 A	14-20P	1655	4350	660
SFWH-6-NU	6	(6) 500 W, 208Y-240 V, 12.0 A	14-20P	1986	5220	720