


Project \_\_\_\_\_  
Item \_\_\_\_\_  
Quantity \_\_\_\_\_  
CSI Section 11400  
Approved \_\_\_\_\_  
Date \_\_\_\_\_

# Concepts® Serving Systems

## Self-Contained Frost Top Serving Counter

### Models

- DC-FT2P Self-contained frost top serving counter, fits 24.13" x 19.29" frost top
- DC-FT3P Self-contained frost top serving counter, fits 37.13" x 19.29" frost top
- DC-FT4P Self-contained frost top serving counter, fits 49.07" x 19.29" frost top
- DC-FT5P Self-contained frost top serving counter, fits 63.13" x 19.29" frost top
- DC-FT6P Self-contained frost top serving counter, fits 76.13" x 19.29" frost top

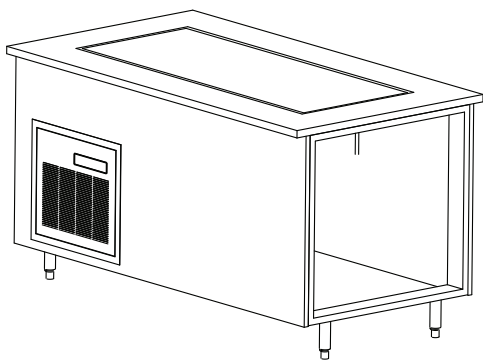

DC-FT4P

### Standard Features

- Heavy duty stainless steel top
- Reinforced stainless steel front and rear removable panels
- Heavy duty base support structure
- Standard on 6" legs
- 18-gauge stainless steel one piece construction and perimeter trough
- 0.5" stainless steel drain
- Must be hard wired in field
- 36" work height
- One year parts and labor standard warranty

### Options & Accessories

- Custom lengths available per inch
- Granite, Hanstone and Solid Surface top materials
- Laminated base panels
- Finished stainless steel or laminated end panels
- Décor panels
- Graphics packages
- FlexiShield® foodshields
- Signage with overstructures, lights and heatlamps\*
- Refrigerated base inserts\*
- Heated base inserts\*
- Dry storage base inserts
- Mechanical access doors
- Fixed and adjustable height casters (stand alone units only)
- Kickplates (units with legs only)
- Tray slides
- 34" and 30" work heights

### Specifications

**Exterior body** is constructed of 0.75" Melamine reinforced front and rear panels with 22 gauge stainless steel skin and 1" polyethylene horizontal rib supports. Horizontal brace on rear is constructed of 18 gauge galvanized steel. The exterior ends are unfinished.

**Exterior top** is constructed of 14 gauge stainless steel. Horizontal top supports on front and rear are constructed with 18 gauge galvanized steel. Top end supports are 12 gauge stainless steel.


**Interior base** bottom is constructed of 16 gauge galvanized steel. Vertical base support braces are 14 gauge galvanized steel.

**Frost top** is 18-gauge stainless steel, one-piece construction and perimeter trough. Underside of frost top is sealed with refrigeration lines and insulated with high density, closed cell polyurethane. Frost top assembly is enclosed in a galvanized steel jacket.


**Refrigeration system** uses R290 refrigerant and has a self-contained 115 volt, 60 Hertz, single phase hermetically sealed condensing unit with adjustable frost top temperature control. Unit has an on/off switch mounted behind the mechanical access door. Frost top is equipped with a 0.5" stainless steel drain plumbed to drain valve located behind the hinged louvered door.

**Legs:** Bases mounted on 6.12" adjustable legs.







DC-FT2P Plan View

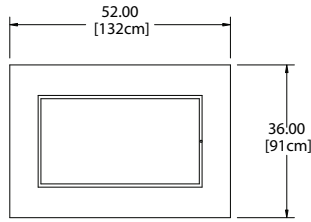


DC-FT3P Plan View

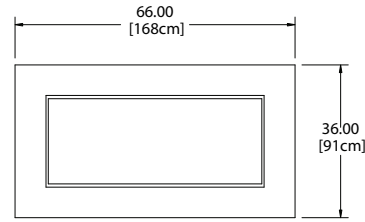


DC-FT4P Plan View




DC-FT2P Elevation View




DC-FT3P Elevation View

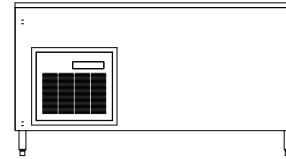


DC-FT4P Elevation View

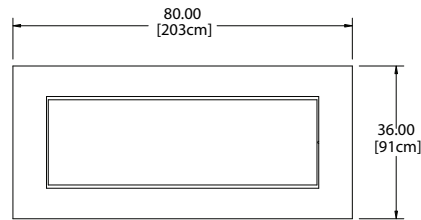


DC-FT5P Plan View

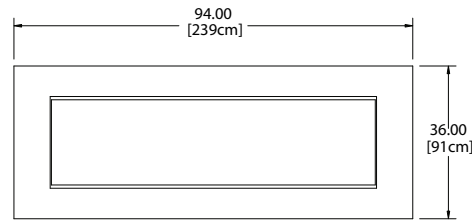

DC-FT6P Plan View

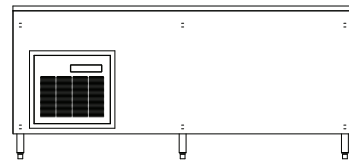

DC-FT5P Elevation View

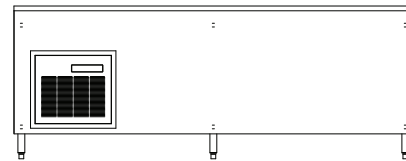


DC-FT6P Elevation View

**INSTALLATION NOTE:**

Refrigeration system is designed so that air will flow under the unit, through the compressor area and out the front of the unit. Any restriction to this air flow path will void the warranties.

**PLEASE NOTE:**

Air flow through the louver on the back of the unit is not necessary for operation, however, any air which passes through the louver is beneficial.



All Models Right Side View

Specifications								
Model	V/Hz/Ph	Amp	H.P.	BTU Load @ 75F	BTU System Capacity @ 75F	Nema Plug	Ship Weight	"DOE kWh/d (base only)
DC-FT2P	115/60/1	2.4	1/5	642	642	5-15P	399 lbs/181 kg	
DC-FT3P	115/60/1	2.4	1/5	861	861	5-15P	546 lbs/248 kg	
DC-FT4P	115/60/1	3.7	1/4	1207	1207	5-15P	693 lbs/314 kg	
DC-FT5P	115/60/1	3.7	1/4	1399	1399	5-15P	840 lbs/381 kg	
DC-FT6P	115/60/1	4.8	1/3	1748	1748	5-15P	987 lbs/448 kg	

Welbilt reserves the right to make changes to the design or specifications without prior notice.