


Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

Concepts® Serving Systems

Ice Cooled Serving Counter

Models

- DC-IC2 Ice cooled serving counter, fits two standard 12"x20" pans
- DC-IC3 Ice cooled serving counter, fits three standard 12"x20" pans
- DC-IC4 Ice cooled serving counter, fits four standard 12"x20" pans
- DC-IC5 Ice cooled serving counter, fits five standard 12"x20" pans
- DC-IC6 Ice cooled serving counter, fits six standard 12"x20" pans

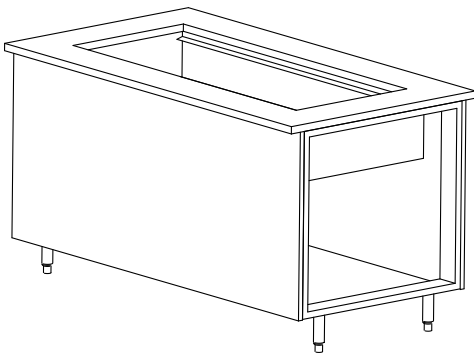

DC-IC4

Standard Features

- Integral V-stamp pan rest
- Heavy duty stainless steel top
- Reinforced stainless steel front and rear removable panels
- Heavy duty base support structure
- Standard on 6" legs
- 1" drain
- Removable perforated false bottom
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane
- 36" work height
- One year parts and labor standard warranty

Options & Accessories

- Custom lengths available per inch
- Granite, Hanstone and Solid Surface top materials
- Laminated base panels
- Finished stainless steel or laminated end panels
- Décor panels
- Graphics packages
- FlexiShield® foodshields
- Signage with overstructures, lights and heatlamps*
- Refrigerated base inserts*
- Heated base inserts*
- Dry storage base inserts
- Mechanical access doors
- Fixed or adjustable height casters (stand alone units only)
- Kickplates (units with legs only)
- Adapter plates and bars
- Tray slides
- 34" and 30" work heights

*Inclusion of these options will alter the electrical specifications of unit

Specifications

Exterior body is constructed of 0.75" Melamine reinforced front and rear panels with 22 gauge stainless steel skin and 1" polyethylene horizontal rib supports. Horizontal brace on rear is constructed of 18 gauge galvanized steel. The exterior ends are unfinished.

Exterior top is constructed of 14 gauge stainless steel. Horizontal top supports on front and rear are constructed with 18 gauge galvanized steel. Top end supports are 12 gauge stainless steel.

Interior base bottom is constructed of 16 gauge galvanized steel. Vertical base support braces are 14 gauge galvanized steel.


Insulated ice pan is 9" (23cm) deep and constructed of 22-gauge stainless steel. A removable, perforated false bottom 1" (2.5cm) high, constructed of stainless steel, is supplied. The ice pan is separated from the

exterior top by a thermal break and fully insulated with foam in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane insulation. Ice pan is equipped with a (1" (2.5cm) I.P.S. drain plumbed to drain valve located toward the operator side bottom inside unit base.


Legs: Bases mounted on 6.12" adjustable legs.




Concepts® Serving Systems: Ice Cooled Serving Counter




DC-IC2 Plan View




DC-IC3 Plan View

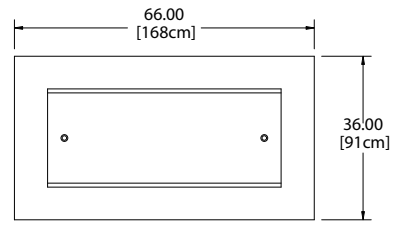


DC-IC4 Plan View




DC-IC2 Elevation View




DC-IC3 Elevation View




DC-IC4 Elevation View

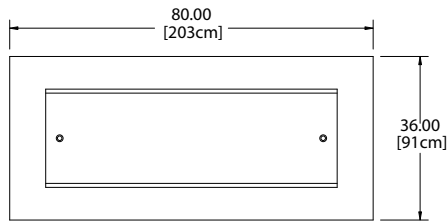


DC-IC5 Plan View

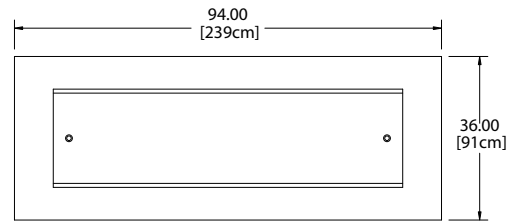

DC-IC6 Plan View

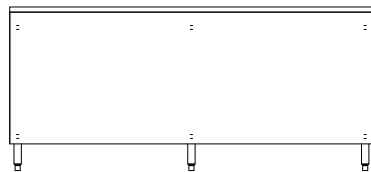

DC-IC5 Elevation View

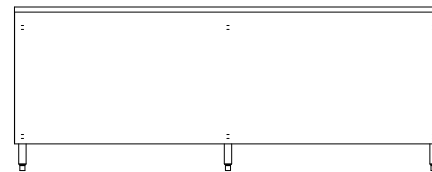


DC-IC6 Elevation View

INSTALLATION NOTE:

Refrigeration system is designed so that air will flow under the unit, through the compressor area and out the front of the unit. Any restriction to this air flow path will void the warranties.

PLEASE NOTE:

Air flow through the louver on the back of the unit is not necessary for operation, however, any air which passes through the louver is beneficial.



All Models Right Side View

Specifications					
Model	Length	Depth	Height	# of 12"x20" Pans Held	Ship Weight
DC-IC2	38.00"	36.00"	36.00"	2	209lbs/95kg
DC-IC3	52.00"	36.00"	36.00"	3	286lbs/130kg
DC-IC4	66.00"	36.00"	36.00"	4	363lbs/165kg
DC-IC5	80.00"	36.00"	36.00"	5	440lbs/200kg
DC-IC6	94.00"	36.00"	36.00"	6	517lbs/235kg

Welbilt reserves the right to make changes to the design or specifications without prior notice.