

F5-P Servview Drop In

Pass Through Self-Contained Refrigerated Display Cases

Models

- F5PC36DP 36" self-contained drop in pass through display
- F5PC48DP 48" self-contained drop in pass through display



F5PC48DP

Standard Features

- Display exterior sides are made of 18-gauge stainless steel
- High density foam reinforced ABS plastic interior sides with molded shelf supports
- (3) adjustable epoxy coated wire shelves
- On/Off switch for display section lights
- Top mount coil with multiple circulating air throughout the cabinet
- Display section runs off an electronic temperature control
- Environmentally friendly R290 refrigerant
- Sliding and removable self-closing 0.50" thick argon filled, low-E, warm edge insert, thermopane glass doors with left and right vertical gasket
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential) polyurethane keeps energy costs low
- One year parts and labor standard warranty
- Remote refrigeration (units must be hard wired in the field)

Options & Accessories

- Additional shelves (36", 48")
- Laminate ends
- 220 volt/50 cycle - inclusion of this option will alter specifications
- Celsius readout for electronic control

Specifications

Display section exterior sides are made of 18-gauge stainless steel. Exterior display section top to be 22-gauge galvanized metal. Interior sides are made of high density foam reinforced 0.095" thick ABS plastic with molded shelf supports. The interior bottom is constructed with stainless steel for long lasting durability. Display section is fully insulated with high density environmentally friendly, Kyoto Protocol Complaint, non-ODP (Ozone Depletion Potential) polyurethane foam between the interior and exterior. Three adjustable epoxy coated wire shelves are provided for the display section. Unit comes standard with proximity sensor in center of display section front. A on/off switch for display section lights is located at the right end of the front facing above the display section doors.

Display case refrigeration system consists of a top mounted coil with multiple fans circulating the air throughout the cabinet utilizing an electronic temperature control. An ABS plastic drip pan is placed below the coil with a clear drain hose for running the condensation to the lower base mechanical section.

Front of the display section is equipped with two sliding and removable self-closing 0.50" thick argon filled, low-E glass doors with a warm edge spacer. The vertical outsides of each door tuck into an extruded channel running vertically up each side. Front and rear nosing to be stainless steel.

Self-contained models have a pre-wired condensing unit housed in a 16-gauge cage hanging from the units exterior bottom. Cage also is supplied with an 8' cord and plug and electrical junction box. Electrical connections are 115V-60H-1PH.

Refrigeration system components are R290. Display cabinet blower coil assembly shall have a coated evaporator coil and fans. Interior refrigerated base cabinet and display section to maintain 36°F to 40°F temperatures at 100°F ambient room temperature.


Back has (2) sliding and removable self-closing 0.50" thick argon filled, low-E glass doors with a warm edge spacer.




R290

F5-P Servview Drop In PASS THROUGH


F5-P Servview Drop In PASS THROUGH

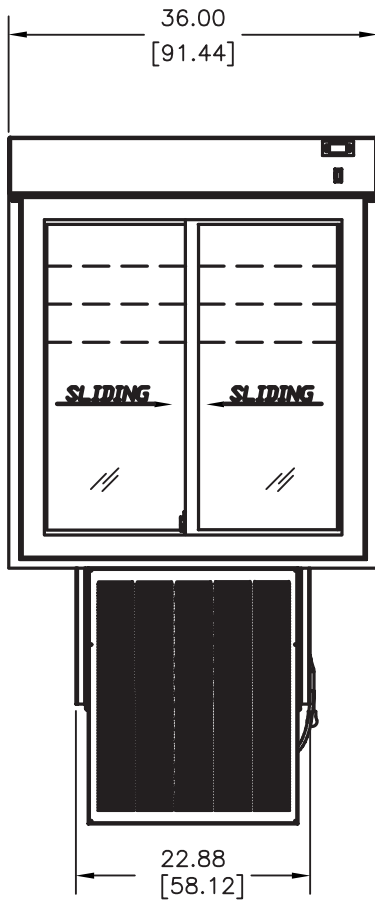

F5PC36DP

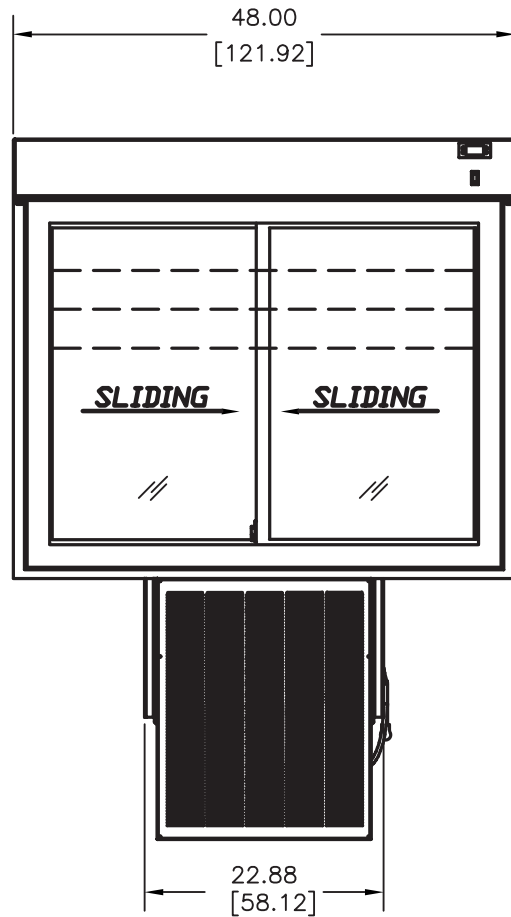


F5PC48DP

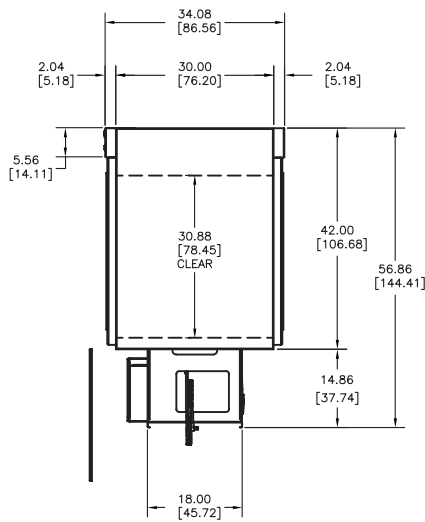

Typical End


Welbilt reserves the right to make changes to the design or specifications without prior notice.

F5 Serview Drop In

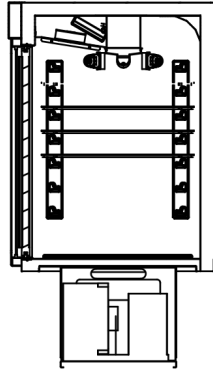

F5PC36-48DP

Mechanical Data

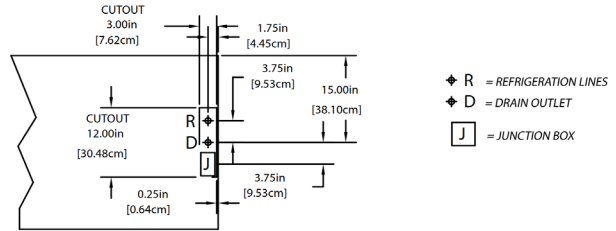

Remote Connections

Model Cut-Out Dimensions and Information

Unit Cut-Out Dimensions

- 36" model requires 23.62" x 18.62" (60cm x 47cm) cutout
- 48" model requires 23.62" x 18.62" (60cm x 47cm) cutout

Air Flow Directions

- Front to rear on 36" and 48" models

Louver Cut-Out Dimensions

- 18.50"W x 22.50"H (47cm x 57cm)

Unobstructed airflow must be maintained to insure unit performance and maintain warranty.

Specifications

Model	Shelf Area	Volume	V/Hz/Ph	Amps	H.P.	Nema Plug	Ship Weight LBS/KG	Refrigerant Charge
F5PC36DP	15.5	18.1	115/60/1	4.5	1/4	5-15P	541lbs / 245kg	150g
F5PC48DP	21.4	25	115/60/1	4.5	1/4	5-15P	609lbs/276kg	150g

Welbilt reserves the right to make changes to the design or specifications without prior notice.