

# AIR-O-TRONICS DEFROST TIMER

## Programming Guide

A (2) 4 position dip switch provides user control of defrost duration and cycle time. The selection is as follows.


### Defrost Time

Dip Switch Setting				min
off	off	off	off	void
on	off	off	off	5
off	on	off	off	10
on	on	off	off	15
on	on	off	on	20
on	off	on	off	25
off	on	on	off	30
on	on	on	off	35
off	off	off	on	40
on	off	off	on	45
off	on	off	on	50
on	on	off	on	55
off	off	on	on	60


### Cycle Time

Dip Switch Setting				hrs
off	off	off	off	void
on	off	off	off	2
off	on	off	off	4
on	on	off	off	6
on	on	off	on	8
on	off	on	off	10
off	on	on	off	12
on	on	on	off	14
off	off	off	on	16
on	off	off	on	18
off	on	off	on	20
on	on	off	on	22
off	off	on	on	24

### Programming Example

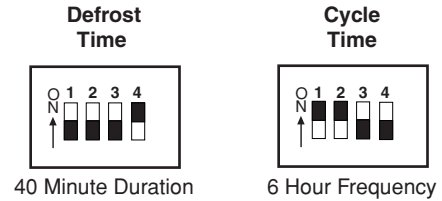

### Typical Sequence of Operation

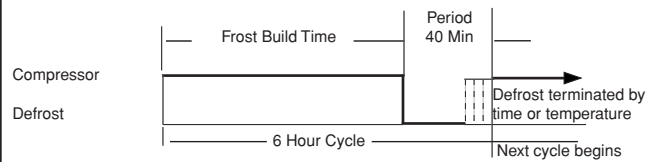

### Defrost timer

NOTE: Dip switches shown in preset positions.

