Delfield

F17DD

Dry Drawer Equipment Stands

Project _____

Item _____

Quantity _____

CSI Section 11400

Approved _____

Date _____

F17DD: Dry Drawer Equipment Stands

Models

- F17DD32 - 32″ length dry drawer chef stand with (1) 32″ drawer
- F17DD46 - 46″ length dry drawer chef stand with (1) 19″ and (1) 27″ drawers
- F17DD54 - 54″ length dry drawer chef stand with (2) 27″ drawers
- F17DD64 - 64″ length dry drawer chef stand with (2) 32″ drawers
- F17DD73 - 73″ length dry drawer chef stand with (1) 19 and (2) 27″ drawers
- F17DD81 - 81″ length dry drawer chef stand with (3) 27″ drawers
- F17DD96 - 96″ length dry drawer chef stand with (3) 32″ drawers

F17DD54

Standard Features

- Top is stainless steel, with integral front marine edge
- Cutting board brackets with 1.25″ thick x 9″ deep maple cutting board
- 6.12″ adjustable full stainless steel legs
- One shelf constructed of stainless steel with double hemmed nosing are spot welded between the sides and supported with two 14-gauge U-channels with PL-400 sound deadening adhesive
- Drawer handles are recessed black plastic and held in with a positive lock system
- Full extension dry drawer system is sized to hold 12″ x 20″ x 4″ or 6″ deep hotel pans (by others)
- One year parts and 90 day labor standard warranty

Options & Accessories

- Stainless steel back
- Stainless steel end
- Laminate back
- Laminate end
- Casters
- Laminate facing (drawer base)
- Lock

Specifications

Stainless steel top is with integral front marine edge nosing and rear backsplash. Stainless steel bars run front to back on both sides for support and spline purposes. Two pieces of U-channel are welded and glued with construction adhesive to the under side of the top for strength and sound deadening. Cutting board brackets are attached to each side and house a 1.25″ thick x 9.5″ deep maple cutting board.

Dry drawer system is sized to hold 12 x 20 x 4 or 6″ deep hotel pans and smaller fractional pans. Drawer track assembly is constructed of stainless steel and each set of tracks are mounted in individual galvanized boxes. Intermediate tracks are removable without tools. Drawer boxes are designed with easy pan grip flanges. Tracks are designed with a stay shut feature that holds the drawer tight to the base front on uneven floors. Exterior drawer fronts are made of stainless steel. Handles are recessed black plastic and held in with a positive lock system.

Legs: Unit is mounted on 6.12″ adjustable stainless steel legs.

NSF®

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981
Fax: 800-669-0619

www.delfield.com

Manitowoc

Delfield



Plan View
All Models



Elevation View
F17DD32



Elevation View
F17DD46



Elevation View
F17DD54

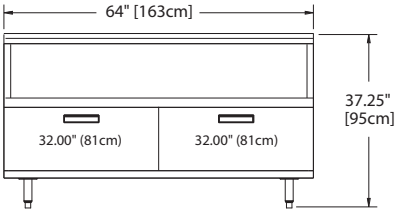

Elevation View
F17DD64

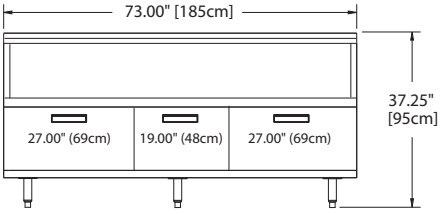

Elevation View
F17DD73

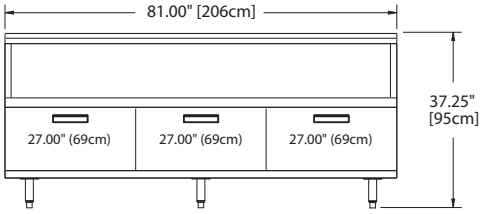

Elevation View
F17DD81

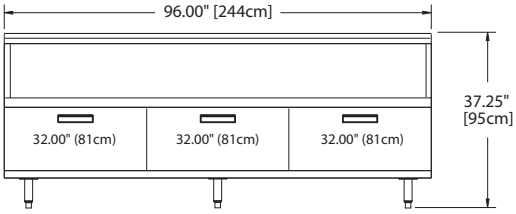

Elevation View
F17DD96

19" & 32" drawers extend 26.08" (66cm)
27" drawers extend 28.18" (72cm)



End View
All Models

Specifications			
Model	Number Of Drawers	12"x20"x6" Pan Capacity	Ship Weight
F17DD32	(1) 32"	2	290lbs/131kg
F17DD46	(1) 19" (1) 27"	3	350lbs/159kg
F17DD54	(2) 27"	4	390lbs/177kg
F17DD64	(2) 32"	4	430lbs/195kg
F17DD73	(1) 19 (2) 27"	5	475lbs/215kg
F17DD81	(3) 27"	6	520lbs/236kg
F17DD96	(3) 32"	6	600lbs/272kg

Dry Drawer Equipment Stands

F17DD

Delfield reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981
Fax: 800-669-0619
www.delfield.com

Printed in the U.S.A.
DSF17DD
02/12

Manitowoc